

PRODUCT CATALOGUE

MANUFACTURING EXCELLENCE



Premium quality geotechnical & structural monitoring instruments.

SINCE 1962

One Company

The complete solution

Our Products

Soil Instruments Limited strives to continuously develop ground breaking, innovative products that are able to meet the challenge of the demanding environments in which we work. Our unique systems enable us to provide multiple solutions simultaneously across diverse industries and locations on a global scale.

These systems include:

- MEMS based digital inclinometers
- Vibrating Wire and solid state piezometers
- Pressure and load cells
- Tilt sensors
- Fiber Optic Sensors
- Automatic data acquisition
- Data presentation software
- GPRS enabled dataloggers

Our equipment is trusted daily in virtually every country in the world to ensure the safety of major construction projects including civil engineering, mining, dams, railways and road infrastructures. Additional products and updated specifications are available on the website.

Our Service

Fundamental to our business strategy is the building of long-term partnerships with our customers, distributors, suppliers and employees. This requires the adoption of a customer-focused, quality-driven service and because we design and manufacture our own monitoring instrumentation, we have an unrivalled understanding of the technology and processes involved.

With the combination of our cutting edge Technology and the vast experience we have at Soil Instruments, we are Committed to providing quality products and services to our customers. To this end we have BS EN ISO 9001:2015 registration for Quality Management Systems.

Active Support

Soil Instruments is uniquely positioned in that we not only design, develop, manufacture premium quality geotechnical and structural instrumentation, we back this up with an exceptional range of support services, including:

Help desk - How can we help you? Call our help desk to discuss your query in person with one of our experts, or visit us online at soilinstruments.com/contact.

Online help - Find a solution to your problem via our web-based support service, including access to a wide range of technical papers on our client Knowledgebase.

In-house manufacturing team - Our design, manufacturing and inspection teams are all situated within the same building, which enables us to have instant access to a wide resource of skills and expertise to help solve problems quickly and efficiently.

Improve your own skills - We provide a range of hands-on training sessions for those clients who wish to improve their own skills.

Product information

THE TECHNICAL RATING:

As the correct installation of any monitoring sensor or system is vital to maximise performance and accuracy, Soil Instruments makes the following recommendations, for the skill level of the installation contractor.

ADDITIONAL SUPPORT

We offer installation and monitoring services to support this system. For more information please email : sales@soilinstruments.com or call **+44 (0) 1825 765044**

ADVANCED



The installer is trained and experienced in the installation of this type of instrument or systems, and is ideally a specialist Instrumentation and Monitoring contractor. Soil Instruments can support installation of advanced systems and provide training.

INTERMEDIATE



The installer already has previous experience and/or training in the installation of this instrument or system.

BASIC



As a minimum the installer has read and fully comprehends the manual, and if possible has observed these instruments or systems being installed by others.



Software



MEMS:

Micro Electro Mechanical Systems, or MEMS, is a technology that uses miniaturised mechanical and electro mechanical elements.



Vibrating Wire Principle:

The physical changes measured by the sensor result in small changes to the position of the movable point which results in a change to the tension of the wire.

Contents

One company, the complete solution	02
Cables	04
Dataloggers, Readouts & Software	08
Extension	12
Inclination	18
Joint & Crack	22
Load & Pressure	28
Settlement	32
Strain	34
Temperature	36
Tilt	38
Water	42



Visit us at:

soil instruments.com

Cables



CA-1.1 Armoured Cable



Description

Cables are most commonly used to connect instruments to their termination point. These range from terminal boxes, junction boxes, data acquisition systems and manual readouts to a variety of other sources.

All of our cables are of a very high quality, manufactured to stringent British Standards



Features

- Armoured cable resists high tensile loading
- PVC sheathing for waterproofing
- Cables can be run over 1000m
- Jointing can be done on site with epoxy jointing kits

Benefits

- Ideal connection on sites where cables may be exposed to weather or at risk of damage
- Reliable, durable and flexible

Specifications

Number of cores	2	4
Materials	Plain annealed 1.5mm ² copper conductors, XLPE insulated, PVC extruded bedding, steel wire armoured and PVC sheathed	
Maximum operating temperature	+ 90°C	
Rating	Up to 600V	
Conductor resistance	92 Ω DC/Km	
Conductors	1.5mm ²	
Weight	280g/m	336g/m

CA2.2 Multicore Cable



Description

The amount of cores available varies greatly and the amount required is determined by the number of sensors to be connected to the cable, soil instruments supplies cable with up to 50 cores.

All of our cables are of a very high quality.



Features

- Multicore cable resists high tensile loading
- Sheathing for waterproofing
- Shielded pairs protect against electrical noise
- Multiple cable options available from 2 to 50 cores
- Cables can be run over 1000m
- Jointing can be done on site with epoxy jointing kits

Benefits

- Ideal connection on sites where cables may be exposed to weather or at risk of damage
- Reliable, durable and flexible

Specifications

Number of cores*	6	12
Materials	Plain annealed 1.5mm ² copper conductors, polyethylene insulated, in twisted pairs each screened with aluminium backed polyester tape, copper drain wire, overall screened and sheathed with polyethylene	
Maximum operating temperature	+70°C	
Rating	440V	
Conductor resistance	39 Ω DC/Km	
Conductors	0.22mm ²	
Weight	55g/m	83g/m

The specifications above are for Multicore Cable - 7/0.20. Multicore Cable - 16/0.20 is available from 4 to 50 cores.

CA3.1 Instrument Cable



Description

There are different kinds of cables that are required according to site requirements.

Instrument packages supplied by soil instruments usually specify which cable is recommended.

All of our cables are of a very high quality.



Features

- Sheathing for waterproofing
- Cables can be run over 1000m
- Jointing can be done on site with epoxy jointing kits

Benefits

- Ideal connection on sites where cables may be exposed to weather or at risk of damage
- Reliable, durable and flexible

Specifications

Number of cores	4	6
Materials	Tinned copper conductors, polyethylene insulated, screened with aluminium backed polyester tape, tinned copper drain wire and sheathed with polyethylene	
Operating temperature	-30 to +80°C	
Rating	30V with polyethylene sheath	
Conductor resistance	39 Ω DC/Km	
Conductors	0.6mm ²	
Weight	29 g/m	36g/m

Low smoke and vented cables are also available. Please contact soil instruments for more details on cables.

BRIDGE APPLICATION

Products	Page	Type of Measurement	Where is it used?	
VWLOG2, GPRS, Sensly Monitoring Platform	8	Datalogger	Used to read, record and display the data from sensors with the option for remote cellular transmission	
Digital Inclinometer, GEOSmart, Inclinometer Casing Smart In-place Inclinometer	18	Inclination	Used to monitor horizontal subsurface failure in a slope/abutments and possible slip plane movement	
VW Crackmeter, VW Triaxial Jointmeter Mechanical Jointmeter	22	Joint & Crack	Monitoring the opening and closing of concrete joints and cracks	
VW Load Cell, Strain Gauge Load Cell	28	Load & Pressure	Used to monitor loads applied to tendons and ground anchors	
Mems Tiltensor	38	Tilt	Used to monitor rotation of main structural components related to bridges	
VW Piezometer, Standpipe Piezometer Water Level Meter	42	Water	Measuring pore pressures within the soil around bridges	



Soil Instruments is recognised as one of the UK's market leaders in the supply of monitoring services for the safety and stability of all bridge applications.

This table illustrates the comprehensive range of instrumentation we typically supply within bridge applications.

soil
INSTRUMENTS

Dataloggers Readouts & Software



D1-VW-LOG2

VWLOG2



Description

The VWlog2 is a simple, rugged, low-power, Stand alone, 2 channel Datalogger which reads most commercially available geotechnical and structural Vibrating Wire (VW) sensors and optional thermistor temperature sensors.



Features

- Reads two Vibrating Wire sensors and combined thermistor temperature sensors
- 4MB internal memory; reads up to 50,000 readings per channel, equating to 5 years of data sampling at hourly intervals
- IP66 rated, rugged, die-cast aluminium enclosure
- True USB interface; data downloaded via drag-and-drop

Benefits

- Optional 15V excitation ensures quality readings from sensors with long cables
- Ideal for long-term monitoring in harsh environments
- Fast setup and download time
- All electronics sealed to protect from static and water damage
- Versatile and economical
- Standard D-Cell powered

Specifications

Vibrating Wire Inputs	
Sweeping frequency range	1700 - 6000 Hz
Accuracy	±0.02 % of full scale
Resolution	0.1 Hz
Output (excitation) voltage	5V and 15V square wave (user selectable)
Power	
Supply	3 V DC using two D Cell alkaline batteries

D1 Dataloggers



Description

The Datalogger is a bespoke, site specific logger with various additional module and communication options combined with a power supply, contained within a steel or reinforced GRP IP65 enclosure.



Features

- Configured to customer requirements according to sensor, power supply and communication requirements
- Can be configured to read almost any geotechnical or structural monitoring sensor
- Data kept in simple ASCII file for use with web based interfaces such as 'ARGUS', or a spreadsheet

Benefits

- Proven track record on major projects
- Rugged construction
- Low power consumption; ideal for remote applications
- Various communication options available (ADSL, short haul modem, GPRS modem)

Specifications

Datalogger - 100Hz scan rate

Analogue Inputs

Multiple differential (DF) and single-ended (SE) individually configured Channels expansion provided by AM16/32 and AM25T multiplexers

Analogue Outputs

Expandable with vast range of accessories to meet project needs

Voltage outputs programmable between ± 2.5 V with 0.67 mV resolution

4Mb, SRAM for data and program storage and CPU usage

Please refer to Datasheet D1 for full specifications

D9 GTecLink Wireless Monitoring System



Description

GTecLink is a data acquisition and monitoring system which combines state-of-the-art wireless monitoring and advanced software tools. It is widely recognised as the leading solution for connecting and monitoring infrastructures in remote locations.



Features

- Long-range comms of over 9 miles / 15km
- Low-power, up to 10 yrs unattended runtime
- Wireless LoRa communication
- Supports most structural and geotechnical sensors (vibrating wire, digital, analog)
- Integrated alarm system
- User-friendly web software
- Compatible with the Connectivity Management Tool (CMT) EDGE software

Benefits

- Remotely monitor hard-to-access infrastructures
- Cover a wide area of installed geotechnical sensors
- Easily add or remove sensors to an existing installation
- Save resources through fast implementation
- Decrease costs through easy maintenance
- Diminish risks and make operations safer

Specifications

Gateway

VW Nodes

Digital Nodes

Analogue Nodes

Tiltmeters

Laser Tiltmeters

Vibration Meter

GNSS Meter

Please call us for full specifications

D14 Sensly Monitoring Platform



Description

'Sensly' is an easy-to-use software suite with a graphical user interface (GUI) that allows quick and easy interpretation of large amounts of instrumentation data from a variety of sources.



Features

- Handles all data processing requirements
- Fully configurable, to suit specific project requirements
- Accessible from anywhere that has an internet connection
- User friendly interface
- Secure login and user access levels

Benefits

- No software installation required
- Provides a reliable and cost-efficient method for processing and monitoring ASCII files with numerical data
- Imports from almost any data acquisition system
- No limit to the number of sensors that can be processed

Specifications

Password protected access with two levels of privileges

Multiple projects with company logos and start-up logos

Multiple users per project available; no licences to pay for additional users

Unlimited amount of plots (pre-defined) per project

Multiple views of the project

Automated and manual import of ASCII files

Establish multiple alert levels with automated email and/or text notifications to keep stakeholders informed in real time

Complex formula builds with references to any sensor in the project


RO TB-JB-TJ

Terminal and Junction Boxes



Description

Terminal Boxes are used for projects that require the integration of cables from multiple instruments into one convenient location. A Terminal Box consists of a fibreglass or die cast aluminium enclosure with a variety of size and switching options.



Features

- Terminates Vibrating Wire, thermistors and two or four-wire type instruments
- Standard Junction/Terminal Boxes (switching and non-switching) cater for 12, 24 or 48 instruments
- Small Terminal Box (non-switching) connects up to 5 separate instruments

Benefits

- Ideal solution for terminating multiple cables
- Allows joining of several individual cables into a single multicore cable
- Provides convenient access for readings
- Provides protection from water ingress and corrosion resistance

Specifications

Small Terminal Box - non switching

For terminating Vibrating Wire, thermistors and 2 wire type instruments; to cater for 1 to 6 instruments

Switched Terminal Unit

For Vibrating Wire, thermistors and other 2 wire type instruments; composed from epoxy fibreglass with lockable hinged door, sealed with a neoprene gasket. Equipped with a rotary switch to select the correct transducer. Standard units cater for 12, 24 or 48 instruments

Junction Box

For projects that require cables from multiple instruments to be integrated into a multi core cable; Standard units cater for 12, 24 or 48 instruments

Other options available, surge protection available on request


RO-1-VW-NOTE

VWnote - Vibrating Wire Note



Description

The VWnote is a handheld readout unit and datalogger which reads most commercially available geotechnical Vibrating Wire (VW) sensors and built-in thermistor temperature sensors. Readings are stored in its internal memory for transfer to a PC via a USB pen drive.



Features

- Portable and rugged
- Compatible with nearly all VW sensors
- Real-time display of VW sensor readings in engineering units as well as in Hz, Hz2/1000 and period
- Reads with user definable sweep range

Benefits

- Easy to carry and operate in all site conditions
- Readings are accurate, repeatable and free from interference
- Taking readings on site is simple, fast and error free
- Selectable higher 15V excitation ensures quality readings for sensors with long cables
- Logging function

Specifications

Vibrating Wire Inputs	
Frequency range	450-6000 Hz
Resolution Accuracy	0.1Hz 0.01% of full scale
On-board excitation	5V and 15V square wave (user selectable)
Temperature Inputs	
Temperature sensor	NTC 3k Ω
Measurement range	-50 to +150°C
Resolution Accuracy	0.01°C $\pm 0.2^\circ\text{C}$
Data Storage Power	
Memory size	2 GB internal SD memory card
Power Supply	Nominal 6V DC NiMH rechargeable battery



Extension



E2 Magnetic Probe Extensometer



Description

The Magnetic Extensometer system comprises a probe, a graduated tape on a reel and an access pipe along which magnetic targets are positioned.

As the probe moves along the access pipe, it detects the magnets by way of a reed switch circuit closing.



Features

- Versatile system with a variety of magnetic targets to suit different applications
- Measures settlement and heave
- Oversized targets are available to use with inclinometer casing
- Magnetic Extensometer probe is available with various tape lengths

Benefits

- Reliable and accurate measuring system that is easy to read
- Any number of targets can be monitored in a single borehole
- One probe reads at many locations

Specifications

Probe / Reel	
Ranges*	30m 50m 100m 150m 200m
Resolution	1mm
Repeatability*	±2mm
Operating temperature	-30 to +80°C
Graduations	mm/cm/m
Indicators	Audio & visual
Probe material	Stainless Steel
Probe diameter	16mm
Tape type	Contoured / shaped copper conductors
Tape material	Steel / polyethylene coated
Reel material	Steel frame / polypropylene hub
Battery life	12 hours continuous use
Weight	1.7kg 2.0kg 3.0kg 3.8kg 4.6kg

E3 Digital Tape Extensometer



Description

The Digital Tape Extensometer is a portable device used for measuring displacement between pairs of eyebolts.

The unit comprises a Stainless Steel measuring tape with equally spaced precision punched holes. The tape winds onto a reel, which incorporates a tape tensioning device and a digital LCD readout.

Features

- Measuring range of up to 30m
- Digital LCD readout giving precise measurement
- Stainless Steel measuring tape
- Optical tension indicator

Benefits

- Compact, portable and lightweight
- Accurate and robust
- Simple, reliable and easy to read
- Repeatable measurements using the optical tape tension indicator
- Can be operated by one person
- Can read multiple arrays using a single instrument

Specifications

Digital Tape Extensometer			
Range	20m	30m	50m
Accuracy*	±0.01mm		
Resolution	0.01mm		
Repeatability*	0.1mm		
Operating temperature	-10 to +60°C		
Tape tension	11kg		
Tension indicator	optical		
Weight excluding tape	1kg		
Tapes			
Lengths	20m	30m	50m
Weight	410g	610g	1kg

E7 Vibrating Wire Soil Extensometer



Description

The Vibrating Wire Soil Extensometer measures lateral deformation of soil and rock, particularly in embankment dams and quarry or mining excavations.

The extensometer consists of a Vibrating Wire displacement transducer contained within a heavy duty sealed housing.

Features

- Accurate, robust and very good long-term stability
- Heavy duty steel housing suitable for burial in rock fill
- Over-voltage surge arrestor fitted to protect against electrical damage
- Waterproof and sealed to 1000kPa

Benefits

- Connecting cable is strong, flexible, armoured and can be used in lengths in excess of 1000m
- Very heavy duty
- Accuracy unaffected by cable length

Specifications

Vibrating Wire Soil Extensometer Transducer	
Range	300mm
Accuracy	±0.2%
Resolution*	0.025%
Operating frequency	1300Hz to 2700Hz
Operating temperature	-20 to +80°C
Thermistor type	NTC 3k Ω
Thermistor accuracy	±0.5°C
Thermistor resolution*	0.1°C
Ingress protection	IP68 to 1000kPa
Extensometer Body	
Body diameter	50mm

E8 Vibrating Wire Deformometer



Description

The Vibrating Wire Deformometer allows for monitoring the changes in the distance between the Deformometer and an anchor point.

Typical applications include the measurement of cracks, joints, structural deformations and convergence in tunnels.

Features

- Uses proven Vibrating Wire technology
- Suitable for long-term monitoring
- Suitable for manual or remote monitoring
- Fully waterproof
- Fitted with thermistor for temperature monitoring

Benefits

- Accurate, repeatable readings over long cable lengths
- Long working life, long-term stability and reliability
- Connecting cable is strong, screened and flexible

Specifications

Vibrating Wire Deformometer		
Range	30mm	50mm
Accuracy	±0.2%	
Resolution*	0.025%	
Operating temperature	-12 to +80°C	
Excitation Method	Pluck or sweep	
Material	316 grade Stainless Steel	
Thermistor type	NTC 3k Ω	
Thermistor accuracy	±0.5°C	
Thermistor resolution*	0.1°C	
Ingress protection	IP68 to 1700kPa	

E9 Draw-Wire Sensor



Description

The Draw-wire sensor, also referred to as wire crack meter and wire extensometer allows for monitoring the changes in the distance between the Draw-wire Sensor and an anchor point.

The compact Draw-wire sensor is designed for large displacements when monitoring cracks, rock masses, earth faults and landslides.



Features

- Suitable for long-term monitoring
- Suitable for manual or remote monitoring
- Rugged design

Benefits

- Accurate, repeatable readings over long cable lengths
- Long working life, long-term stability and reliability
- Connecting cable is strong, screened and flexible
- Ideal for installations in harsh environments

Specifications

Draw-Wire Sensor				
Ranges mm*	120	317	635	1270
Type	4-20mA(2 wire)/0-10VDC			
Accuracy +/-% FS	1		0.25	
Resolution	Essentially Infinite			
Repeatability +/-% FS	0.05			
Input Voltage	4-20mA = 8-40VDC 0-10VDC = 12-32VDC			
Operating Temp °C	-40 to +70			
Measuring wire tension N +/-25%	3.2	3.7	3.2	3.2
Ingress Protection	IP67			

E17 Rod Extensometer System



Description

The Rod Extensometer system accurately measures settlement and/or heave at single or multiple anchor points in a borehole and at its reference head.

The Rod Extensometer system can be assembled on site or can be supplied pre-assembled to specified lengths.



Features

- Rods and heads are available pre-assembled to customer specified lengths
- Fibreglass rods (GRP)
- Various anchor types available
- Remote monitoring using Vibrating Wire displacement transducers and wireless systems such as GTec Link
- Up to 8 measuring points per borehole
- Lighter, condensed construction

Benefits

- Quicker deployment than conventional rod extensometer systems
- Less sensitive to temperature changes than steel
- Enabling installation in varied soil conditions and orientation
- Ideal for remote and difficult to access locations
- Provides greater visibility of the settlement profile

Specifications

Type	Vibrating Wire Transducer	Digital Depth Gauge
Ranges	30mm 50mm 100mm 150mm 200mm	±60mm
Accuracy	±0.2% full scale	±0.02mm
Resolution*	0.025% fs	0.01mm
Temperature range	-20 to +80°C	n/a
Excitation method	Pluck or Sweep	n/a





TUNNEL APPLICATION

Products	Page	Type of Measurement	Where is it used?	
VWLOG2, GPRS, Sensly Monitoring Platform	8	Datalogger	Used to read, record and display the data from sensors with the option for remote cellular transmission	
Tape Extensometer, Continuous Rod Extensometer	12	Extension	Manual monitoring of tunnel cross section convergence and tunnel wall displacement	
Digital Inclinator, GEOSmart, Inclinator Casing Smart In-place Inclinator	14	Inclination	Used to monitor horizontal subsurface failure in a slope and possible slip plane movement	
VW Crackmeter, VW Triaxial Jointmeter Mechanical Jointmeter	22	Joint & Crack	Monitoring the opening and closing of fissures in a tunnel wall	
VW Concrete Stress Cell, VW Pressure Cell	28	Load & Pressure	Used to measure load or pressure in a tunnel wall	
VW Strain Gauges	34	Strain	Measuring strain in steel members or mass concrete	
Mems Tiltsensor	38	Tilt	Monitoring the differential displacement profile of a tunnel wall	
VW Piezometer	42	Water	Used to measure pore pressure build up due to consolidation of soils	



Soil Instruments provides a comprehensive tunnel monitoring service, covering everything from new construction to refurbishment and the effects of adjacent operations, including software-based monitoring and control systems for major international infrastructure projects.

This table illustrates the comprehensive range of instrumentation we typically supply within Tunnel applications.

soil
INSTRUMENTS

Inclination



C1 Hanging and Inverted Pendulum System



Description

Hanging and Inverted Pendulums are used for accurate and long-term monitoring of horizontal movements in large structures such as dams, bridges, nuclear power stations, towers and tall buildings.



Features

- Greater measuring accuracy than precise geodetic surveying
- Manual or automatic readouts available
- Simple to use
- Long-term reliability

Benefits

- Movements can be observed at frequent intervals without repeated and costly surveys
- Ideal for long-term use
- Can read X, Y and Z movement

Specifications

Portable Pendulum Readout	
Range	X = $\pm 75\text{mm}$, Y = $\pm 75\text{mm}$
Accuracy	$\pm 0.1\text{mm}$
Resolution	0.1mm
Repeatability*	$\pm 0.1\text{mm}$
Eyepiece	0° 45° 90°
Weight	4kg
Automatic Pendulum Readout (CCD)	
	X = $\pm 25\text{mm}$, Y = $\pm 25\text{mm}$
Ranges	X = $\pm 25\text{mm}$, Y = $\pm 50\text{mm}$
	X = $\pm 25\text{mm}$, Y = $\pm 50\text{mm}$, Z = $\pm 25\text{mm}$
Accuracy	$\pm 0.1\text{mm}$
Resolution	0.02 % FS
Repeatability*	$\pm 0.01\text{mm}$
Temperature range	-15°C to +60°C
Output	RS485 / 4-20mA

C9 Easy Connect Inclinometer Casing



Description

EC (Easy Connect) Casing is an ABS inclinometer casing that pushes together, requiring no rivets, tape or glue.

The casing is manufactured using advanced extrusion techniques which results in a highly accurate groove profile, allowing accurate orientation of inclinometer probes and In-Place Inclinometers (IPs).



Features

- Push fit, faster and easier to install than standard inclinometer casing
- Reliable joints; a machined slot ensures consistent keyway alignment
- Watertight; an O-ring on each seal prevents ingress of water or grout
- Deep, tight groove profile ensures accurate data

Benefits

- Requires no rivets, tape or glue
- Saving in installation time; significantly reduces labour cost and drill rig standby charges
- Can be used in conjunction with magnetic extensometers to form a combined inclinometer/extensometer

Specifications

Material	ABS (Acrylonitrile Butadiene Styrene)
Groove spiral	< 0.5° / 3m
Collapse rating	1960kPa
Bend rating	252N
Maximum temperature	80°C
Tensile strength	585kgF
Torque	25Nm
Casing length	1m, 2m and 3m
Outside diameter	70mm
Inside diameter	59mm

C9-4 Quick Drive Inclinometer Casing



Description

QD (Quick Drive) Casing has all of the advantages of EC (Easy Connect) Casing, combined with a mild steel nose cone for driving into pre-formed window sampling holes and shallow installations in soft soils.

The casing can be extended or joined at any point along its length using standard or telescoping couplings.



Features

- Fitted with mild steel nose cone
- Push fit, faster and easier to install than standard inclinometer casing
- Reliable joints; a machined slot ensures consistent keyway alignment
- Watertight; an O-ring on each seal prevents ingress of water or grout

Benefits

- Extremely simple, driven installation technique
- Requires no rivets, tape or glue
- Saving in installation time; significantly reduces labour and drill rig standby charges
- End cone ensures that the casing fixes well, thereby providing an accurate datum

Specifications

Material	ABS (Acrylonitrile Butadiene Styrene)
Groove spiral	< 0.5° / 3m
Collapse rating	1960kPa
Bend rating	252N
Maximum temperature	80°C
Tensile strength	585kgF
Torque	25Nm
Cone diameter	76mm
Outside diameter	70mm
Inside diameter	59mm

C18 Standard Inclinometer Casing



Description

Standard Inclinometer Casing is manufactured using advanced extrusion techniques which results in a deep and highly accurate groove profile, ensuring accurate and repeatable data. The casing is joined together using standard or tele-scoping couplings with rivets, glue and tape to seal against water or grout ingress.



Features

- Deep, tight groove profile ensures accurate data
- Available in 70mm and 85mm outer diameters
- Manufactured from virgin ABS

Benefits

- Cost effective
- Reduced wastage; casing can be cut and joined at any point along its length
- Can be used in conjunction with magnetic extensometers to form a combined inclinometer/extensometer

Specifications

	70mm OD	85mm OD
Material	ABS (Acrylonitrile Butadiene Styrene)	
Groove spiral	< 0.3° / 3m	
Collapse rating	1960kPa	1770kPa
Bend rating	3.07kN	2.65kN
Maximum temperature	80°C	
Tensile strength	705kgF	700kgF
Torque	520Nm	481Nm
Length	3m	
Outside diameter	70mm	85mm
Inside diameter	62mm	77mm

C2 GEOSmart In-Place Inclinator



Description

GEOSmart is an in-place inclinometer with closely spaced MEMS 0.5 metres apart, mounted on stainless steel tubing with a single cable running the length of the string. Due to its lightweight robust construction with joints capable of bending up to 90°, GEOSmart is conveniently transported to site and can be installed by one site technician.



Features

- Real time monitoring
- Sensors are connected sequentially
- Borehole displacement in engineering units (mm/m)
- Nodes pre-loaded with calibration information
- Modular and robust design
- Lightweight with joints capable of bending 90°

Benefits

- GEOSmart is ideal for continuous, unattended monitoring and can deliver readings in real time.
- Only one signal cable per borehole, quicker installation and simplified connection to the data logger.
- Quicker and easier installation as segments can be installed in any order.
- Can be removed at end of project and redeployed on new applications.

Specifications

Calibrated range	±30° from vertical over a temperature of -10°C to +40°C
Resolution*	9 arc seconds / 0.04 mm/m
Repeatability	±82 arc seconds / 0.4mm/m
Operating temperature	-20°C to +50°C
Casing Diameter	Fits 70mm OD, Inclinator casing or 1.5" nominal bore Schedule 40 PVC pipe
Input voltage	From 10V Dc to 30V DC
Distance between sensors	0.5m
Minimum number of sensors	2
Maximum number of sensors	200
Ingress protection	IP68 to 2Mpa

C12-PRO

Smart In-Place Inclinator (IPI)



Description

The C12 PRO IPI is designed to be light weight, robust and highly accurate utilising micro electro mechanical system (MEMS) by incorporating a new digital bus system capable of reading up to 100 sensors per borehole.



Features

- Single cable system
- Onsite allocation of sensor IDs
- Mechanical/electrical connection rated to IP68 to 1000 kPa
- Sensor strings give a readily automated profile of vertical displacements
- New digital bus system
- Robust modular design


Benefits

- Up to 100 PRO IPI sensors per borehole or 50 sensors on a mains/solar Gteclink node
- Fast onsite installation
- Easy to automate using a data acquisition system, with up to 50 sensors on a mains/solar Gteclink node
- Suitable for submersed installations
- Easy integration to Gteclink and Senceive wireless systems with up to 30 sensors on a standard Gteclink node

Specifications

Calibrated range	±10°
Sensor accuracy	±0.04mm/m (±0.0125% full scale)
Resolution*	0.003mm/m (0.001% full scale)
Repeatability	±0.02mm/m (±0.006% full scale)
Operating temperature	-10 to +50°C
Input voltage	12-30V DC
Housing material	Stainless Steel
Ingress protection	IP68 to 100mH ₂ O (1000kPa)
Minimum casing internal diameter	56mm
Maximum casing internal diameter	72mm

C13 In-Profile Inclinometer Data Presentation Software

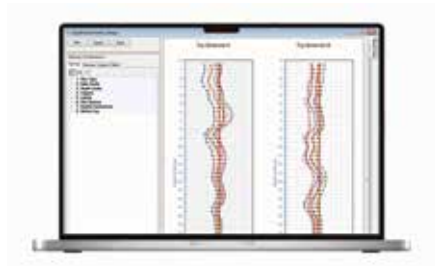

Description

'In-Profile' software has been developed for the purpose of importing and analysing inclinometer data. 'In-Profile' has been designed to be user friendly and simple to use.

C17-NXG Vertical Digital Inclinometer System



Description

The Vertical Digital Inclinometer System is used to measure lateral deflections within a borehole. The system comprises a biaxial probe, cable reel and ultra-rugged Field Tablet supplied with 'In-Port PRO' data capture software.

C20 Horizontal Digital Inclinometer System



Description


The Horizontal Digital Inclinometer System is used to take highly accurate readings of horizontal profiles. The system comprises a biaxial probe, cable reel and a rugged Field Tablet supplied with 'In-Port' data logging software.

Features		
• Easy exportation of trend graphs • Simple icons and menus • Strata can be easily applied with fill patterns and colours to define • Report function • Handles data from all popular types of inclinometers		
Benefits		
• Downloaded data can be viewed in various formats • Exported graphs can be viewed without the use of 'In-Profile' software • Easy handling and presentation of data		
Specifications		
Data entry	Direct retrieval File import Manual entry	
Graph export formats	HTML	Print to PDF
Units supported	Metric	Imperial
Gauge length	No length restrictions	
Inclinometer systems	Most commercially available systems supported	
Interpretation views	Cumulative Displacement Plan View Incremental Displacement Absolute Position	

Features	
• Large 7" display robust Field Tablet • Borehole recognition system • Auto run feature for rapid borehole runs • Review datasets graphically upon completion of borehole run • Small diameter probe for traversing tighter bend radius in inclinometer casing • Optional android mobile support available in lieu of tablet	
Benefits	
• Stainless Steel Probe with revolutionary new connector design • Digital signal allows interference-free data transmission • Easy data transfer via Bluetooth, direct connection or internet using Wi-Fi or GSM network • Long battery life	
Specifications	
Calibrated range	$\pm 30^\circ (\pm 250\text{mm} [\pm 12'])$
Sensor accuracy	$\pm 0.02\%$ full scale ($\pm 0.1\text{mm}$)
Resolution	0.005mm [0.0002"]
Repeatability	$\pm 0.005\%$ full scale
Operating temperature	-20 to +70°C
Probe gauge length	500mm
Probe diameter	25.4mm
System accuracy* (over 25m)	$\pm 2\text{mm}$
Minimum casing internal diameter	38mm
Maximum casing internal diameter	83mm

Features	
• Field Tablet with custom 'In-Port' software • Metal marker/cable gate system • Kevlar reinforced cable • Bluetooth connection between cable reel and Field Tablet • Accurate and precise measurements using MEMS sensors	
Benefits	
• Elimination of cable resistance and noise issues • Repeatable depth control using metal markers and cable gate system • High degree of repeatability • No water ingress or connection failures • Light and easily portable	
Specifications	
Calibrated range	$\pm 30^\circ$
Resolution	0.005mm
Repeatability	$\pm 0.003^\circ$
Operating temperature	-20 to +70°C
Probe gauge length	500mm (metric system) or 24" [imperial system]
Probe diameter	25mm
Maximum Casing Diameter	85mm OD

Joint & Crack

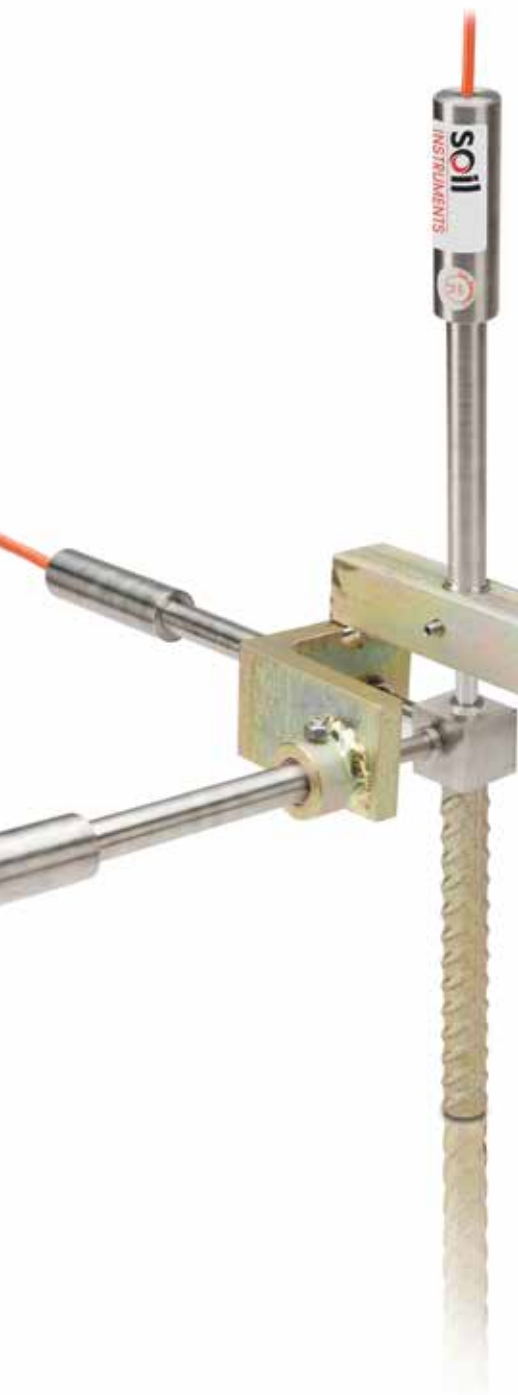

J1 Vibrating Wire Embedment Jointmeter



Description

The Vibrating Wire Embedment Jointmeter is designed to monitor movement of joints in mass concrete structures.

The jointmeter comprises two parts; a detachable socket and a protective main body which houses a Vibrating Wire displacement transducer.



Features

- Highly accurate and robust; accuracy unaffected by cable length
- Connecting cable is strong, screened, flexible and can be used in lengths in excess of 1000m
- Option to fit a thermistor
- Over-voltage surge arrestor fitted to protect against electrical damage

Benefits

- Very good long-term stability
- Suitable for remote reading and datalogging
- Thermistor option enables examination of temperature effects

Specifications

Sensor			
Ranges	30mm	50mm	100mm
Accuracy	±0.2% full scale		
Resolution*	0.025% full scale		
Temperature range	-20 to +80°C		
Excitation method	Pluck or sweep		
Material	PVC / 316 grade Stainless Steel		
Ingress protection	IP68 to 1700kPa		
Thermistor			
Type	NTC 3k Ω		
Accuracy	±0.5°C		
Resolution*	0.1°C		

J2 Vibrating Wire Crackmeter



Description

The Vibrating Wire Crackmeter provides accurate measurement of crack propagation for structural or geotechnical monitoring.

The sensor is made from high quality Stainless Steel, incorporates O-rings to allow for underwater use and is designed for long-term, reliable monitoring.



Features

- Uses proven Vibrating Wire technology
- Suitable for long-term monitoring
- Suitable for manual or remote monitoring
- Fully waterproof
- Fitted with thermistor for temperature monitoring

Benefits

- Accurate, repeatable readings over long cable lengths
- Long working life, long-term stability and reliability
- Connecting cable is strong, screened and flexible

Specifications

Sensor			
Ranges	30mm	50mm	100mm
Accuracy	±0.2% full scale		
Resolution*	0.025% full scale		
Temperature range	-20 to +80°C		
Weight less cable	190g	212g	254g
Dimensions*	290mm x 19mmØ	340mm x 19mmØ	450mm x 19mmØ
Excitation method	Pluck or sweep		
Material	316 grade Stainless Steel		
Ingress protection	IP68 to 1700 kPa		

J3 Vibrating Wire Triaxial Jointmeters



Description

The Vibrating Wire Triaxial Jointmeter is designed to monitor three way displacement (X, Y and Z) at joints and cracks.

The reference anvil design allows the VW transducers to show independent movement in all directions, irrespective of each other.



Features

- Reads in X, Y and Z axes
- Uses proven Vibrating Wire technology
- Proven in long-term monitoring
- Suitable for manual or remote monitoring
- Fully waterproof
- Fitted with thermistor for temperature monitoring
- Accurate and robust

Benefits

- Three way independent movement monitoring in one easy installation
- Accurate, repeatable readings over long cable lengths
- Long working life, long-term stability and reliability
- Over-voltage surge arrestor fitted to protect against electrical damage
- Connecting cable is strong, screened and flexible

Specifications

Vibrating Wire Transducer	
Range	+/- 15mm
Accuracy	±0.2% full scale
Resolution*	0.025% full scale
Temperature range	-20 to +80°C
Weight less cable	190g
Material	316 grade Stainless Steel
Excitation method	Pluck or sweep
Dimensions²	290mm x Ø19mm
Ingress protection	IP68 to 1700kPa
3D Mounting	
Material	Zinc plated steel
Dimensions	260mm x 112mm x 112mm

J4 Vibrating Wire Perimetric Jointmeter



Description

The Vibrating Wire Perimetric Jointmeter is designed to monitor three way displacement at joints and cracks. The reference anvil design allows the Vibrating Wire transducers to show independent movement in all directions, irrespective of each other.



Features

- Reads in X, Y and Z axes
- Uses proven Vibrating Wire technology
- Proven in long-term monitoring
- Suitable for manual or remote monitoring
- Fully waterproof
- Fitted with thermistor for temperature monitoring
- Accurate and robust

Benefits

- Three way independent movement monitoring in one easy installation
- Accurate, repeatable readings over long cable lengths
- Long working life, long-term stability and reliability
- Over-voltage surge arrestor fitted to protect against electrical damage
- Connecting cable is strong, screened and flexible

Specifications

Vibrating Wire Transducer		
Range	50mm	100mm
Resolution*	0.025% full scale	
Accuracy	Accuracy ±0.2mm% full scale	
Temperature range	-20 to +80°C	
Weight less cable	190g	254g
Dimensions*	L 290mm x Ø19mm L 450mm x Ø19mm	
Excitation method	Pluck or sweep	
Material	316 grade Stainless Steel	
Ingress protection	IP68 to 200kPa	

J5 Mechanical Triaxial Jointmeter



Description

The Mechanical Triaxial Jointmeter is designed to monitor three way displacement (X, Y and Z) across joints or cracks between adjoining concrete and rock structures.

The jointmeter comprises two elements; a measurement arm and a reference head, both attached to embedment anchor stems.



Features

- Reads in X, Y and Z axes
- Accurate and precise
- Proven in long-term monitoring
- Simple in principle and operation
- Accepts digital or dial depth gauge

Benefits

- Three way independent movement monitoring in one easy installation
- Low and easy maintenance
- Long working life, long-term stability and reliability

Specifications

Jointmeter			
Ranges	±12mm	±35mm	±75mm
Dimensions*	248 x 242 x 94mm	275 x 345 x 125mm	345 x 385 x 208mm
Material	Mild steel, zinc coated frame Stainless Steel reference surface		
Reference Anvil			
Material	Stainless Steel		
Dimensions	31mm ²	170 x 165 x Ø10mm	170 x 165 x Ø10mm
Anchors			
Type	Groutable		

J6 Linear Potentiometer Crackmeter



Description

The Linear Potentiometer Crackmeter is a highly accurate and robust instrument used to measure displacements across cracks and joints of a structure.

The potentiometer is installed across a crack or joint of the structure to be monitored, using groutable or expanding shell anchors.



Features


- High resolution and accuracy
- Robust design
- Suitable for long-term monitoring
- Suitable for manual or remote monitoring
- Two versions available; Standard (IP67) and Submergible (IP68 to 1700 kPa)


Benefits

- Accurate, repeatable readings
- Long working life
- Long-term stability and reliability
- Connecting cable is strong, screened and flexible

Specifications


Linear Potentiometer			
Ranges*	25mm	50mm	100mm
Accuracy	±0.25% full scale		
Repeatability	< ± 0.01 mm		
Temperature range	-30 to +150°C		
Weight less cable	26g	29g	37g
Dimensions*	95L x Ø9.5mm	120L x Ø9.5mm	178L x Ø9.5mm
Ingress protection	IP67		
Anchors			
Type	Groutable	Expanding Shell	
Materials	Zinc plated steel		
Diameter	12mm	16mm	

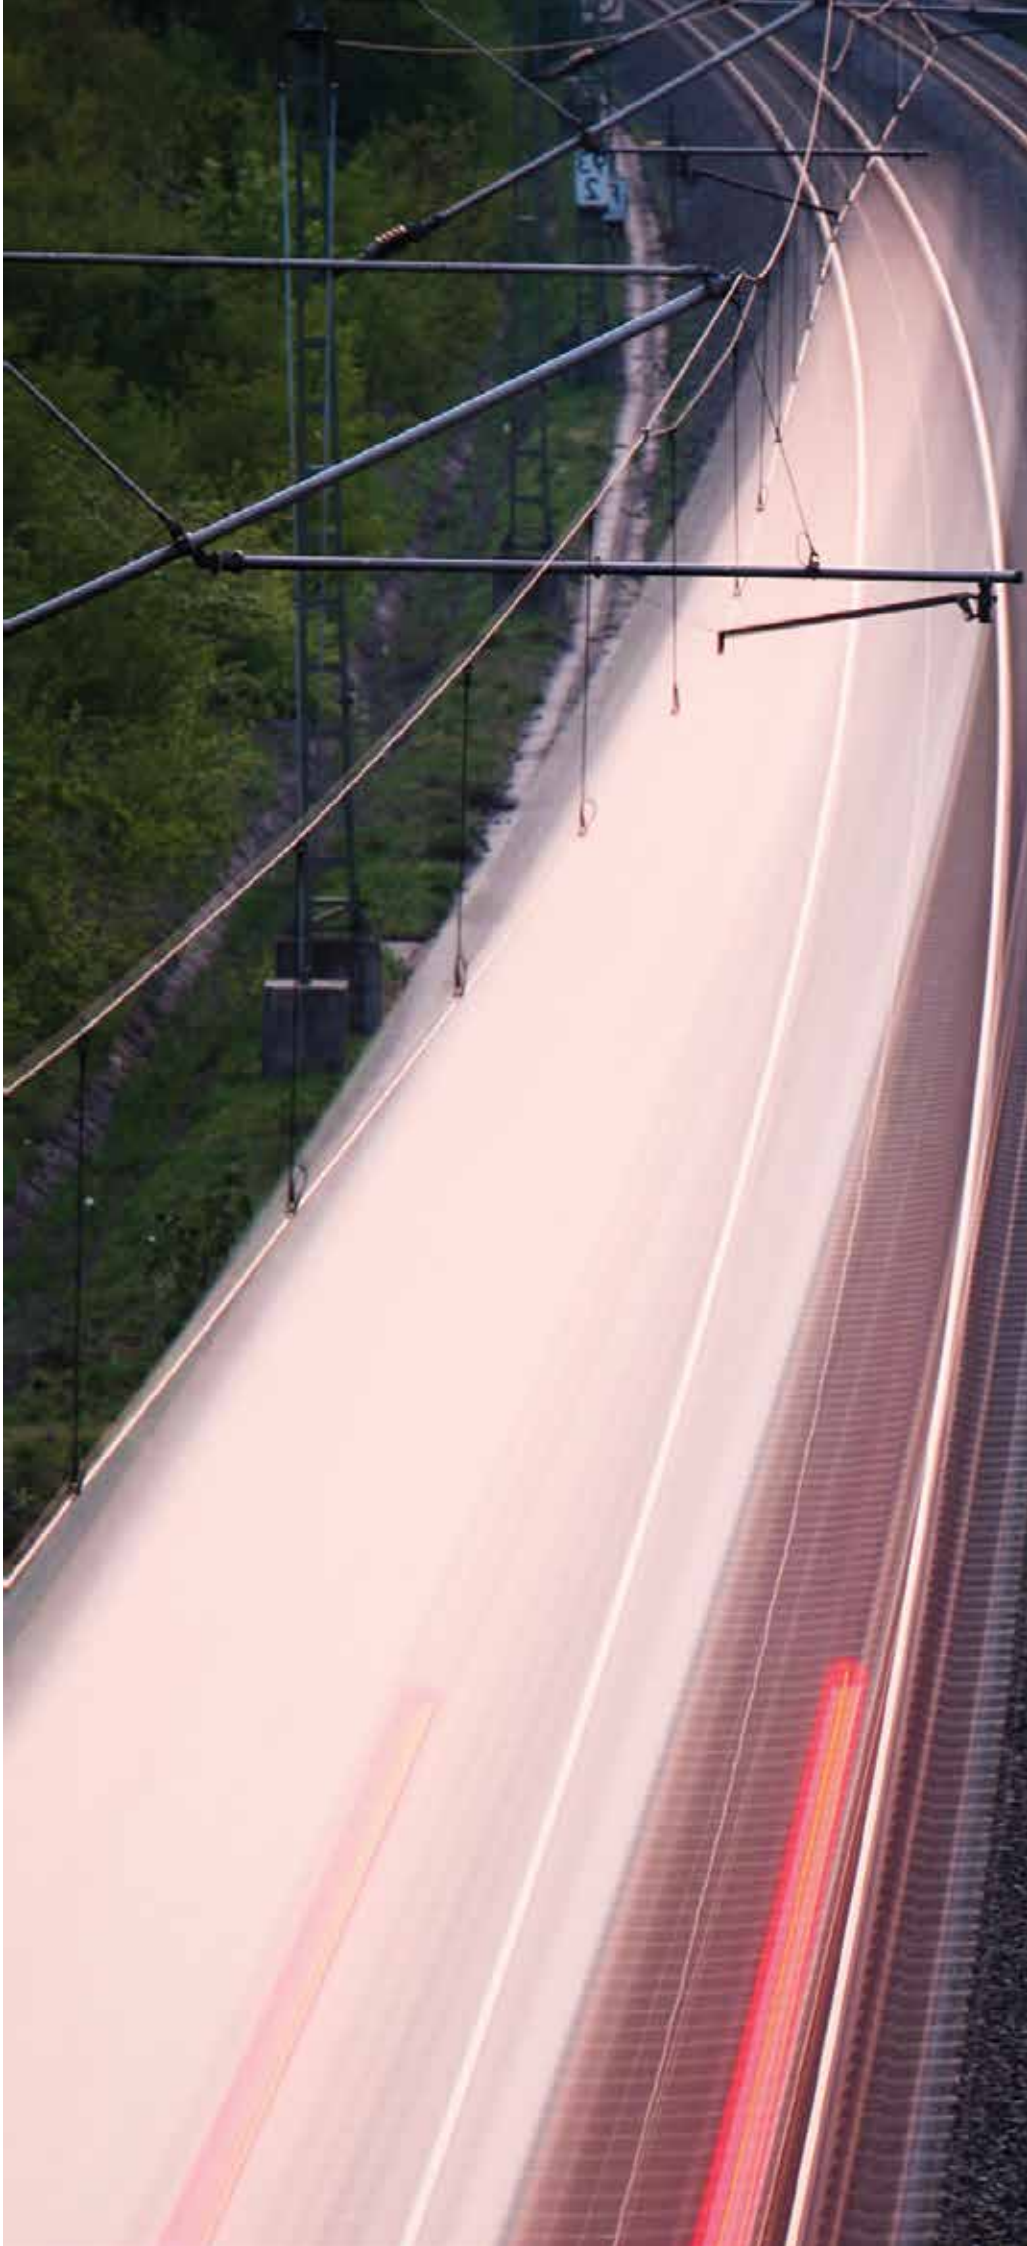

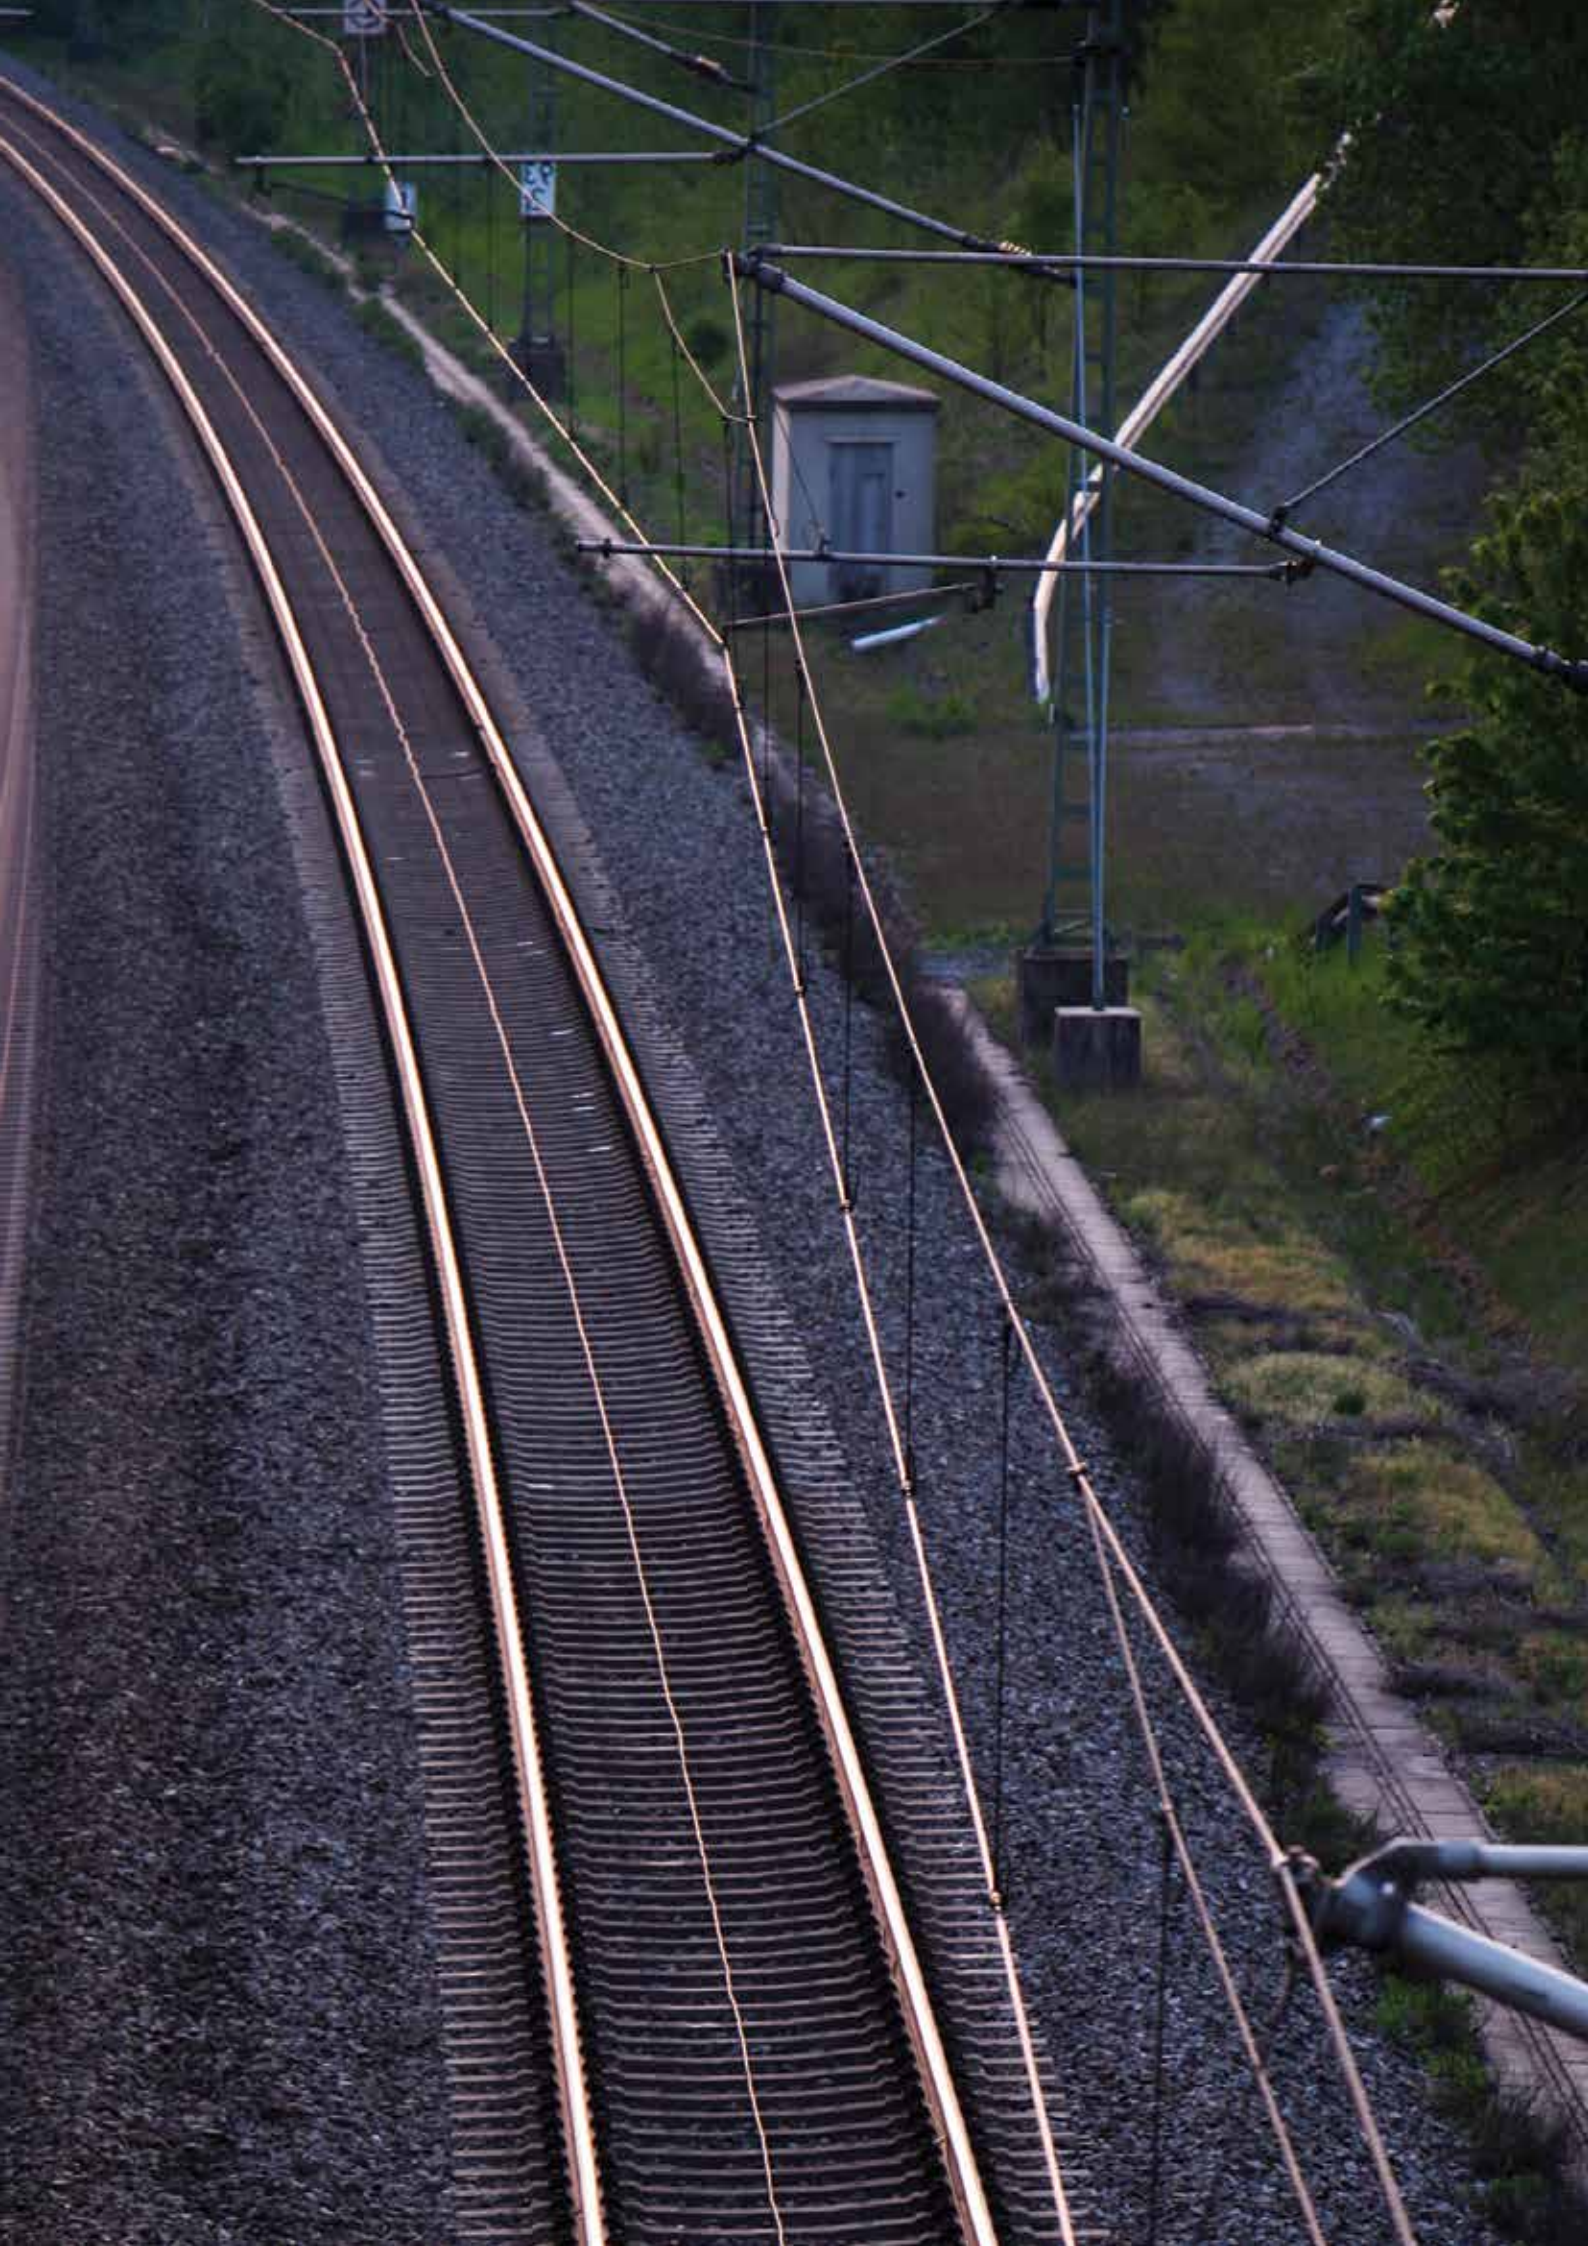

ROAD APPLICATION

Products	Page	Type of Measurement	Where is it used?	
VWLOG2, GPRS, Sensly Monitoring Platform	8	Datalogger	Used to read, record and display the data from sensors with the option for remote cellular transmission	
Tape Extensometer, Continuous Rod Extensometer	12	Extension	Manual monitoring of tunnel cross section convergence and tunnel wall displacement	
Digital Inclinator, GEOSmart, Inclinator Casing Smart In-place Inclinator	14	Inclination	Used to monitor horizontal subsurface failure in a slope and possible slip plane movement	
VW Crackmeter, VW Triaxial Jointmeter Mechanical Jointmeter	22	Joint & Crack	Monitoring the opening and closing of fissures in a tunnel wall	
VW Load Cell, Strain Gauge Load Cell	28	Load & Pressure	Used to measure load in retaining anchors	
Settlement Profiler	32	Settlement	Monitoring of horizontal profiles of settlement beneath embankments.	
VW Strain Gauges, Spot Weldable Strain Gauges	34	Strain	Measuring strain in steel members or mass concrete	
MEMs Tiltensor	38	Tilt	Monitoring the differential displacement profile of a structure	
VW Piezometer, Standpipe Piezometer Water Level Meter	42	Water	Used in the foundations of embankments to measure pore pressure build up due to consolidation of soils	

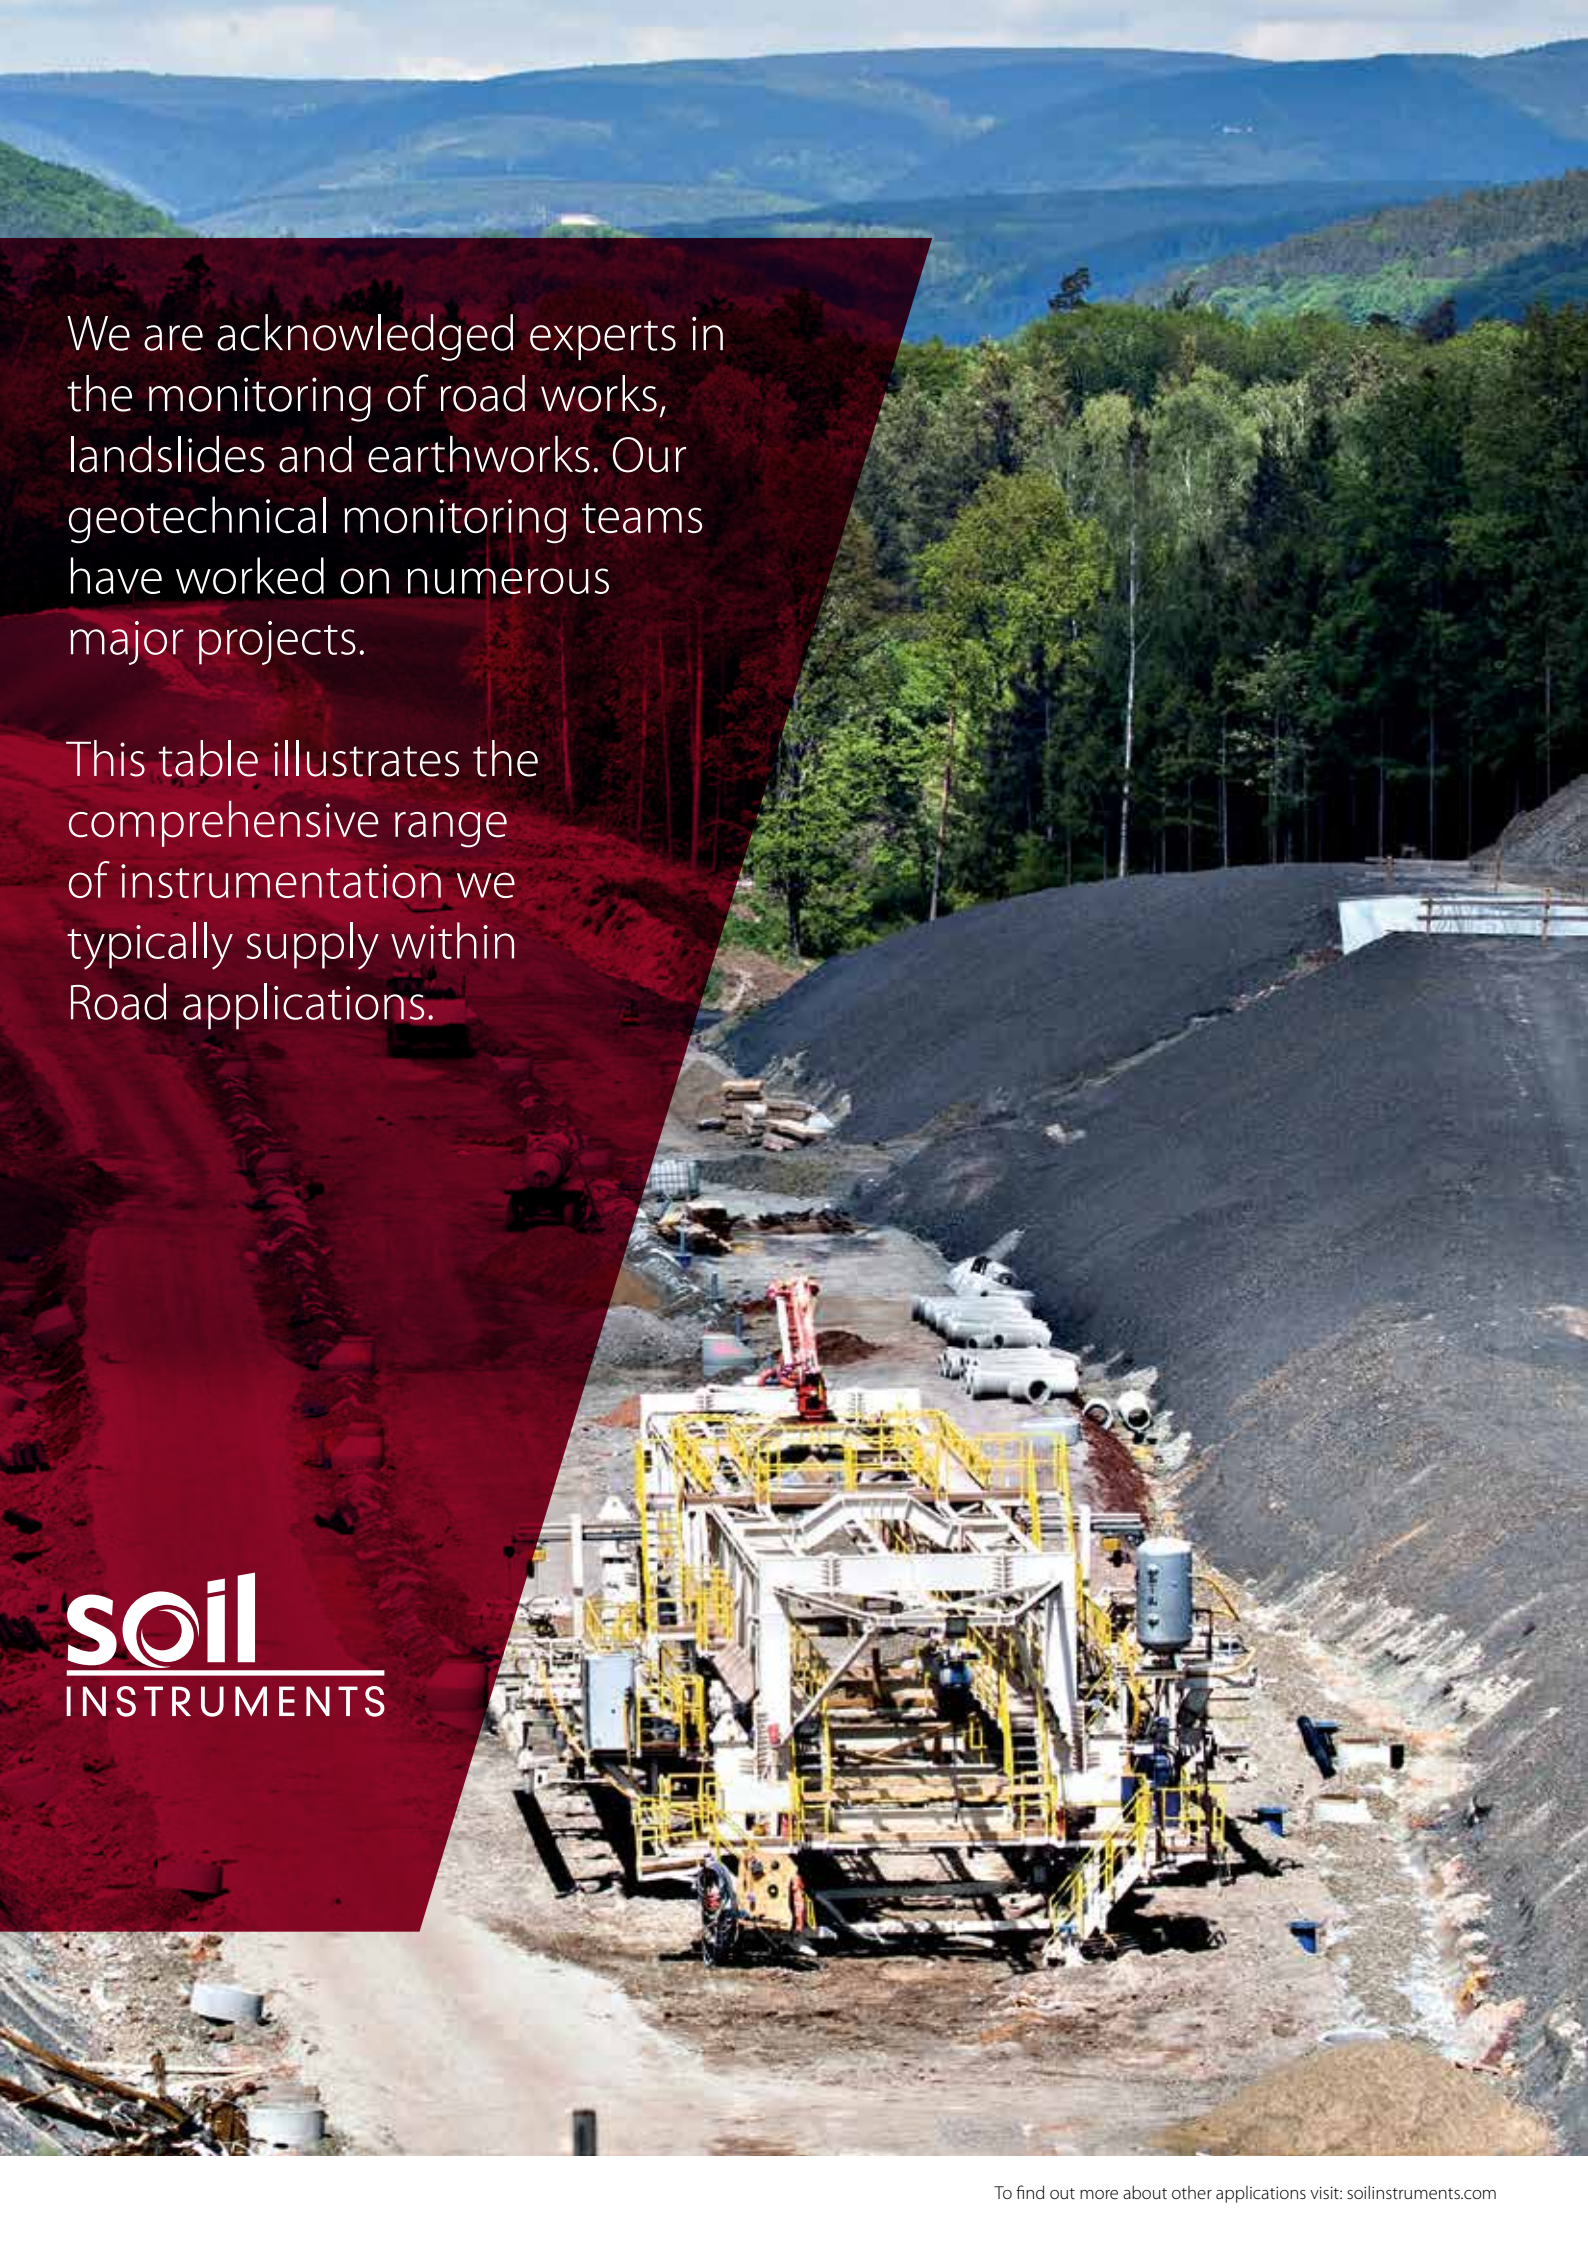

We are acknowledged experts in the monitoring of road works, landslides and earthworks. Our geotechnical monitoring teams have worked on numerous major projects.

This table illustrates the comprehensive range of instrumentation we typically supply within Road applications.

soil
INSTRUMENTS

Load & Pressure



L1 Hydraulic Load Cell



Description

The hydraulic load cells are mounted directly at the fixing point of the anchor and measure tension on the anchor in a precise and cost-efficient way.

The load measuring units are used for constant monitoring of the forces weighing on ground anchors, soil nails and cables.



Features

- Compression force
- Measuring forces on ground anchors
- Environment temperature -30 to +60°C
- Housing and piston galvanized steel, stainless steel as an option
- Piston displacement $\leq 0,5$ mm
- Available with or without power consumption

Benefits

- They can be used for:
- Long-time monitoring of anchor loads
- Monitoring of anchor- and vertical loads in tunnel building or mining, in the construction of foundations and construction pits, retaining walls, slopes and other applications
- Pile loads and pile testing

Specifications

Type	Gauge	4-20mA
Range	0-200kN to 0-10,000kN	
Accuracy	$\pm 1.0\%$	$\pm 0.5\%$
	Full Scale	Full Scale
Output	Optical	4-20mA (2 wire)
Temperature Range	-30°C to +60°C	
Supply Voltage	N/A	10 to 30 VDC
Fill Medium	Glycerine/Water	
Material	Galvanised steel	
Thermistor resolution*	N/A	0.1°C

L2 Vibrating Wire Load Cell



Description

The Vibrating Wire Load Cell is designed to directly measure load in piles, rock bolts and between tunnel supports, as well as tension in cable anchors. The load cell comprises a set of up to six Vibrating Wire gauges mounted parallel to the cell axis and spaced at equal distances radially in a cylindrical housing.



Features

- Uses proven vibrating wire technology
- Robust construction with no moving parts
- Temperature compensated

Benefits

- Accurate readings over longer cable lengths exceeding 1km
- Extended working life and long-term stability
- Negligible temperature effects compared to oil-filled load cells

Specifications

kN Range	500 750 1000 1500 2000 3000 4000 5000 6000
Accuracy*	$\pm 0.25\%$ full scale
Resolution*	0.025% full scale minimum
Over range	150% full scale
Temperature range	-20 to +80°C
Excitation method	Pluck or sweep
Frequency range	2200Hz to 2800Hz
Ingress protection*	IP66
Material	Plated Steel
Thermistor type	NTC 3k
Thermistor accuracy	$\pm 0.5\%$ full scale
Thermistor resolution*	0.1°C

L3 Strain Gauge Load Cell



Description

The Strain Gauge Load Cell measures compressive and tensile loads in rock bolts, cable anchors and tendons. The load cell consists of a Stainless Steel cylindrical housing with up to 16 resistance strain gauges in a Wheatstone Bridge configuration.

Available in mV/V or 4-20mA signal



Features

- Accurate and robust with very good long-term stability
- Fast response time
- Suitable for remote reading and datalogging
- Negligible temperature effects compared to hydraulic load cells
- Connecting cable is strong, screened and flexible

Benefits

- Option for dynamic monitoring
- Effects of uneven and eccentric loads are minimised
- Corrosion-resistant
- Available with top and bottom load plates for use as a solid centre cell

Specifications

kN Range	300 500 750 1000 1250 1500 1800 2500 3000
Accuracy*	$\pm 0.5\%$ full scale
Repeatability	0.02% full scale
Sensitivity	2mV/V $\pm 0.1\%$
Over range	150% full scale
Compensated temperature range	-10 to +50°C
Temperature range	-20°C to +70°C
Excitation	5 -15 V DC
Ingress protection*	IP67
Material	Stainless Steel
Input/Output resistance	700 $\pm$ 20 Ω 700 $\pm$ 5 Ω

P6 Vibrating Wire Pressure Cell



Description

The Vibrating Wire Pressure Cell is used to measure total pressure, particularly in earth or rockfill structures.

The VW Pressure Cell has two designs; the double face design providing two active faces and the single face design providing one active face.

P8 Vibrating Wire Jack Out Pressure Cell



Description


The Vibrating Wire Jack Out Pressure Cells are used to measure pressures on diaphragm walls during excavation. They are installed within the diaphragm wall cage. An optional piezometer within the unit allows the measurement of pore water pressure and therefore the derivation of effective pressure.

P9 Push-In Vibrating Wire Pressure Cell



Description

The Push-In Vibrating Wire Pressure Cell measures total earth pressures in all soil types. The cell is spade-shaped and pointed at one end. A piezometer within the unit allows the measurement of pore water pressure and therefore the derivation of effective pressure.



Features


- Accurate, reliable and robust
- Low, medium and high pressure ranges available
- Low volume change and slender profile
- Single and double active faces available
- Various pressure ranges available
- Suitable for manual or remote monitoring

Benefits

- Accurate, repeatable readings over long cable lengths
- Long-term working life and stability
- Arching and stress concentrations minimised
- Over-voltage surge arrestor protects against electrical damage

Specifications

Standard ranges (kPa)	300 500 700 1000 1500 2000 3000 4000 6000 10000 15000
Accuracy*	±0.1% full scale
Linearity*	±0.1% full scale
Resolution*	0.025% full scale minimum
Temperature range	-20 to +80°C
Over range capacity	150% full scale
Material	Stainless/Powder Coated Steel
Excitation method	Pluck or Sweep
Thermistor type	NTC 3K Ω
Thermistor accuracy	0.5°C
Thermistor resolution	0.1°C



Features


- Uses proven Vibrating Wire technology
- Accurate, reliable and robust design
- Various ranges of size and pressure available
- Suitable for manual or remote monitoring

Benefits

- Accurate, repeatable readings
- Long working life with long-term stability
- Design prevents case stresses from affecting readings
- Over-voltage surge arrestor protects against electrical damage

Specifications

Cell/Piezometer	
Standard ranges (kPa)	300 500 700 1000 1500 2000 3000 4000
Frequency range	1700 – 2800Hz
Resolution*	0.025% FS (minimum)
Accuracy*	±0.1% FS
Linearity*	±0.1% FS
Temperature range	-20°C to +80°C
Over-range capacity	150% FS
Excitation method	Pluck or sweep



Features

- Measures total earth pressures in all soil types
- Recoverable push-in casing
- Additional integral pore pressure sensor allows derivation of effective pressure
- Fitted with thermistor for monitoring temperature variations

Benefits

- Push-in design facilitates perfect contact with the soil
- Accurate, repeatable readings over long cable lengths
- Fast response to low volume pressure changes
- Over-voltage surge arrestor protection

Specifications

STD Ranges (kPa)	300 500 700 1000 1500 2000 4000
Accuracy*	±0.1% full scale
Linearity*	±0.5% full scale
Resolution*	0.025% full scale minimum
Temperature range	-20 to +80°C
Over range capacity	150% of full scale
Material	Powder Coated Steel Cell
Excitation method	Pluck or sweep
Thermistor type	NTC 3K Ω
Thermistor accuracy	0.5°C
Thermistor resolution	0.1°C

P10

Vibrating Wire
Concrete Stress Cell



Description

The Vibrating Wire Concrete Stress Cell measures radial and tangential stresses in shotcrete, concrete and rock, usually in tunnel linings.

The cell consists of a rectangular flat jack formed from two plates of steel welded together around the periphery.



Features

- Measures stress on and within linings of underground excavations
- Monitors stress distribution in rock
- Compensation tube offsets the effects of concrete hydration shrinkage, restoring cell contact pressure
- Internal thermistor monitors temperature variations

Benefits

- Accurate, repeatable readings over long cable lengths
- Long-term, stability, reliability and working life
- Suitable for remote reading and data logging
- Over-voltage surge arrestor protection

Specifications

STD Ranges (kPa)	300 500 700 1000 1500 2000 3000 4000 6000 10000 15000
Accuracy*	0.1% full scale
Linearity*	±0.1% full scale
Resolution*	±0.025% full scale minimum
Temperature range	-20 to +80° C
Over range capacity	150% of full scale
Material	Stainless Steel
Excitation method	Pluck or Sweep
Thermistor type	NTC 3K Ω
Thermistor accuracy	0.5°C
Thermistor resolution	0.1°C



Settlement

S1 Hydraulic Overflow Settlement Cell



Description

For the remote measurement of vertical movement at discrete and inaccessible site locations.

Features

- Simple, accurate and inexpensive
- Up to 300m tubing lengths can be used as standard
- No vertical rods or tubes to interfere with construction activities

Benefits

- Unaffected by temperature or barometric pressure changes
- Long working life, long-term stability and reliability

Specifications

Standard ranges	1m or 2.5m of settlement
Accuracy*	±1mm
Resolution	1mm
Repeatability*	±1mm

S8 Vibrating Wire Settlement Cell



Description

The Vibrating Wire Settlement Cell measures settlement and heave in soil and rockfill.

The cell consists of a Vibrating Wire pressure transducer connected via a pair of water filled nylon tubes to a hydraulic datum pot located on stable ground.

Features

- Uses proven Vibrating Wire technology
- 15m and 30m ranges available
- Borehole and trench types available
- No vertical rods or tubes to interfere with construction activities
- Twin liquid lines allow for recirculation of water through the system after installation

Benefits

- Accurate, repeatable readings over long cable lengths
- Long working life, long-term stability and reliability
- Over-voltage surge arrestor protects against electrical damage
- Measurements unaffected by lateral movements

Specifications

Settlement Cell/Transducer	15 metres	30 metres
Range (kPa)	150	300
Accuracy Linearity	±0.1% full scale	
Resolution*	0.025% full scale	
Over range capacity	200% full scale	
Diaphragm displacement	<0.001cm ³	
Temperature range	-20 to +80°C	
Excitation method	Pluck and sweep	
Operating frequency	1600 to 3000Hz	
Thermistor type	NTC 3k Ω	
Thermistor accuracy	0.5°C	
Thermistor resolution*	0.1°C	
Transducer material	316 Stainless Steel	
Casing material	PVC	

S8 Vibrating Wire Settlement Cell Low Profile



Description

The Vibrating Wire Settlement Cell measures settlement and heave in soil and rockfill.

The cell consists of a Vibrating Wire pressure transducer connected via a pair of water filled nylon tubes to a hydraulic datum pot located on stable ground.



Features

- Uses proven Vibrating Wire technology
- 15m and 30m ranges available
- No vertical rods or tubes to interfere with construction activities
- Twin liquid lines allow for recirculation of water through the system after installation

Benefits

- Accurate, repeatable readings over long cable lengths
- Long working life, long-term stability and reliability
- Over-voltage surge arrestor protects against electrical damage
- Measurements unaffected by lateral movements

Specifications

Settlement Cell/Transducer	15 metres	30 metres
Range (kPa)	150	300
Accuracy Linearity	±0.1% full scale	
Resolution*	0.025% full scale	
Over range capacity	200% full scale	
Diaphragm displacement	<0.001 cm ³	
Temperature range	-20 to +80°C	
Excitation method	Pluck and sweep	
Operating frequency	1600 to 3000Hz	
Thermistor type	NTC 3k Ω	
Thermistor accuracy	0.5°C	
Thermistor resolution*	0.1°C	
Transducer material	316 Stainless Steel	

S10 Mechanical Settlement System



Description

Mechanical Settlement Systems are simple instruments used to monitor: Settlement in the ground beneath surcharges or embankments. Measurement and monitoring the settlement of individual soil layers. Heave (uplift) resulting from excavation or grouting. Settlement associated with dewatering. Subsidence in marine fills/land reclamation.



Features

- Readout by optical survey of the top of the inner pipe or by measuring the length of added tube
- Various sizes of settlement plates available
- Different lengths of stainless steel measuring rods available
- Adapter for optical targets available

Benefits

- Low costs
- Reliable, simple to install and read
- Monitoring of settlement parallel to construction progress
- Measuring rods can simply be added to extend the measuring point

Specifications

Settlement Plate Dimensions	
Square settlement plate	300mm x 300mm x 5mm, 3/4inch BSP socket
Standard settlement plate	300mm diameter x 10mm, 3/4inch BSP socket
Large round settlement plate	750mm diameter x 10mm 2 inch BSP socket
Square settlement plate	500 x 500 x 20mm 2 inch BSP socket
Heavy duty settlement plate	Plate: 500 x 500 x 12.5mm Upright: 2 inch diameter tube, 1m length, support buttresses, including a 2 inch BSP socket
Settlement Tubing Dimensions	
25mm diameter tube	1m length, steel tube, 3/4 inch BSP thread on either end, includes coupling
60mm diameter tube	1m length, mild steel, 2 inch BSP thread either end, includes coupling
75mm diameter spigot and socket tube	1m length, plastic tube, for use with 60mm settlement tube

S17 Hydrostatic Profile Gauge



Description

The Digital Hydrostatic Profile Gauge is used to monitor the profile of settlement or heave and is predominately used for monitoring beneath embankments or structures where access to the surface is not possible.



Features

- Provides a settlement monitoring profile
- Bluetooth connection between cable reel and field tablet
- Single ended access
- Enhanced, easy interface software compatible with most office systems and applications
- Repeatable position control using metal markers

Benefits

- No field connections required
- Large data storage capacity
- Uses low cost access tubing
- Cost effective over many profile measurements
- Portable system
- No need for special borehole casing (such as inclinometer casing)

Specifications

Range*	+1m to -3.5m
Accuracy	±10mm
Resolution	1mm
Repeatability	±10mm
Operating temperature	-10 to +50°C
Tubing	
Tube lengths*	50m 100m 200m
Tube diameter	12mm
Graduation interval	1m
Graduation marker material	Stainless Steel

Strain

ST1 Vibrating Wire Spot Weldable Strain Gauge



Description

The Vibrating Wire Spot Weldable Strain Gauge measures strain in steel members. It consists of a sealed tube containing a Vibrating Wire element with weldable anchors at each end.

A factory fitted, four-core screened cable connects the coil to the readout unit.



Features

- Suitable for manual or remote reading
- Removable coil unit
- Range is adjustable to suit compression or tension
- Contains an integral thermistor
- Waterproof to 700 kPa

Benefits

- Accurate, repeatable readings over long cable lengths
- Long working life, long-term stability and reliability
- Coils are re-useable
- Small, low profile design

Specifications

Range	3000 Microstrain
Accuracy	±0.5% full scale
Resolution*	0.4 Microstrain
Temperature range	-20 to +80°C
Active gauge length	50.4mm
Excitation method	Pluck or sweep
Sensor material	Stainless Steel
Sensor weight	6g
Sensor dimensions	65mm L x 13mm W x 6mm H
Thermistor type	NTC 3k Ω
Thermistor accuracy	±0.5°C
Thermistor resolution*	0.1°C

ST2 Vibrating Wire Arc Weldable Strain Gauge



Description

The Vibrating Wire Arc Weldable Strain Gauge measures strain in steel members. It consists of a coil assembly, Vibrating Wire element and two weldable anchors.

The Strain Gauge incorporates O-ring seals to provide waterproofing, and allows the tube to remain unstressed.



Features

- Suitable for manual or remote reading
- Range is adjustable to suit compression or tension
- Contains an integral thermistor
- O-ring seals provide waterproofing

Benefits

- Accurate, repeatable readings over long cable lengths
- Long working life, long-term stability and reliability
- Robust and reliable

Specifications

Range	3000 Microstrain
Accuracy*	±0.1% full scale
Resolution*	1 Microstrain
Temperature range	-20 to +80°C
Active gauge length	141.4mm
Excitation method	Pluck or sweep
Sensor material	Stainless Steel
Sensor weight	50g
Sensor dimensions	157mm L x 12.7mm Ø
Thermistor type	NTC 3k Ω
Thermistor accuracy	±0.5°C
Thermistor resolution*	0.1°C

ST3

Vibrating Wire Concrete Surface Mount Strain Gauge



Description

The Vibrating Wire Concrete Surface Mount Strain Gauge measures strain in concrete members. It consists of a coil assembly, Vibrating Wire element and two groutable anchors to embed the unit in the concrete structure to be monitored. A factory fitted, four-core screened cable connects the coil to the readout unit.



Features

- Adjustable strain gauge for the most effective use of the instrument range
- Individually calibrated
- Integral thermistor
- Waterproof
- Gauge and coils are re-useable

Benefits

- Accurate, repeatable readings over long cable lengths
- Long working life, long-term stability and reliability
- Can be used with long cable lengths with no degradation of signal
- Suitable for remote reading and data logging

Specifications

Range	3000 Microstrain
Accuracy*	±0.1% full scale
Resolution*	1 Microstrain
Temperature range	-20 to +80°C
Active gauge length	141.4mm
Excitation method	Pluck or sweep
Sensor material	Stainless Steel
Sensor weight	50g
Sensor dimensions	157mm L x 12.7mm Ø
Mounting Anchors	
Material Finish	Steel Zinc Plated
Dimensions	25mm L x 25mm H x 16mm W

ST4

Vibrating Wire Embedment Strain Gauge



Description

The Vibrating Wire Embedment Strain Gauge is used for measuring strain in mass concrete.

The 150mm long gauge, which is made from Stainless Steel, may be pre-attached to rebar or by attachment to a 2, 3 or 4 directional rosette, thereby measuring strain in several directions.



Features

- Located within concrete
- Uses proven Vibrating Wire technology
- Suitable for manual or remote monitoring
- Fully waterproof
- Fitted with thermistor for temperature monitoring

Benefits

- Accurate, repeatable readings over long cable lengths
- Long working life, long-term stability and reliability
- Over-voltage surge arrestor protects against electrical damage
- Connecting cable is screened and flexible

Specifications

Range	3000 Microstrain
Accuracy*	±0.1% full scale
Resolution*	1 Microstrain
Temperature range	-20 to +80°C
Active gauge length	150mm
Excitation method	Pluck or sweep
Sensor material	Stainless Steel
Sensor weight	58g
Sensor dimensions	157mm x Ø19mm
Thermistor type	NTC 3k Ω
Thermistor accuracy	±0.5°C
Thermistor resolution*	0.1°C

ST5 Vibrating Wire Rebar Strain Gauge



Description

The Vibrating Wire Rebar and Sisterbar Strain Gauges measure strain in concrete and consist of a coil assembly and a Vibrating Wire element with rebar extensions at each end.

Rebar Strain Gauges are welded into the reinforcing cage and must be matched to the size and grade of the rebar forming the cage.



Features

- Located within rebar cage
- Individually calibrated
- Integral thermistor
- Waterproof

Benefits

- Accurate, repeatable readings over long cable lengths
- Long working life, long-term stability and reliability
- Suitable for remote reading and data logging
- Unaffected by bending

Specifications

Range	
Sisterbar	2000 Microstrain
Rebar	3000 Microstrain
Accuracy	±0.25% full scale
Resolution*	<0.4 Microstrain
Temperature range	-20 to +80°C
Length	900mm
Excitation method	Pluck or sweep
Material	Stainless Steel
Rebar strain gauge diameters	16mm 18mm 20mm 22mm 25mm 28mm 32mm 36mm 40mm
Sister bar diameter	12mm
Frequency range*	1800-2800Hz
Coil Housing Type	Integral, with Thermistor

Temperature



T2 Resistance Temperature Sensor



Description

The PT100 Resistance Temperature Sensor measures the resistance of a platinum element. The resistance is then converted to temperature.

T3 Vibrating Wire Temperature Sensor



Description

The Vibrating Wire Temperature Sensor comprises a Stainless Steel body which houses a Vibrating Wire sensing unit/transducer. As the body expands or contracts due to temperature, this changes the tension in the vibrating wire. The resulting frequency is converted to output temperature.

T4 Thermocouple Temperature Sensor



Description

The Thermocouple Temperature Sensor comprises two dissimilar conductors joined at one end to form a hot junction. This junction produces a voltage so as the junction is heated or cooled, the voltage changes and is converted to return the temperature.

Features

- Accurate and robust with good long-term stability
- High resolution
- Suitable for manual or remote reading, scanning and datalogging

Benefits

- Strong, screened and flexible cable

Specifications

Type	PT 100 resistance
Range	-30 to +100°C
Accuracy	±0.2°C
Resolution*	0.01°C
Housing material	Stainless Steel
Dimensions	80mm x 15.8mmØ
Cable	4 core, screened, 7/0.20
Readings	Manual or remote

Features

- Accurate and robust with good long-term stability
- High resolution
- Suitable for manual or remote reading, scanning and datalogging

Benefits

- Strong, screened and flexible cable can exceed 1000m

Specifications

Type	Vibrating Wire
Range	-20 to +80°C
Accuracy	±0.5% full scale
Resolution*	0.03°C
Housing material	Stainless Steel
Dimensions	130mm x Ø19mm
Cable	4 core, screened, 7/0.20
Readings	Manual or remote

Features

- Accurate with good long-term stability
- Fast response time
- Suitable for manual or remote reading and datalogging
- Low cost option

Benefits

- Lightweight cable for easy handling
- 100m cable lengths possible

Specifications

Type	Type 'T' Thermocouple
Range	-10 to +150°C
Accuracy	±1°C
Resolution*	0.1°C
Housing material	PVC bonded sheath
Dimensions	30mm x 5mmØ
Cable	2 core, 13/0.20
Readings	Manual or remote

Tilt

TLT5 Mems Beam Sensor



Description

The MEMS Beam Sensor measures rotation of structures in the vertical plane. When multiple beams are placed end to end, a differential displacement profile of the structure from anchor point to anchor point can be derived.

Features	
- Inter-connecting Smart Sensors - Accurate and precise measurements using MEMS sensors - Multiple beams installed in a chain give a complete displacement profile - Measures tilt along the whole length of the beam Measures vertical rotation - Large measuring range	
Benefits	
- Fast onsite installation with minimal cable management; reduces cable and Datalogger costs - Easy to automate using data acquisition system and 'ARGUS' software - Removes the need for manual monitoring - Recoverable and reusable - Suitable for safety critical applications - Fast onsite installation; no zero level adjustment required	
Specifications	
Sensor	
Range	$\pm 10^\circ$
Accuracy	$\pm 0.05\%$ full scale
Resolution	0.001% full scale
Repeatability	$\pm 0.006\%$ full scale
Operating temperature	-10 to +50°C
Input voltage	11 - 16 VDC
Current consumption	23mA
Housing material	Aluminium
Ingress protection	IP68
Dimensions	L 1m/2m/3m x W 38mm x H 38mm
Weight	1m 1.82kg 2m 2.42kg 3m 3.02kg

TLT6 Mems Tiltensor



Description

The MEMS Tiltensor is designed to monitor vertical rotations of structures.

Mounted within an Aluminium housing is a biaxial MEMS sensor that delivers a large measuring range with high sensitivity and relative immunity from the effects of long cable lengths.

Features	
- Accurate and precise measurements using MEMS sensors - Available in biaxial versions - Inbuilt temperature compensation	
Benefits	
- Easy to automate using data acquisition systems and 'ARGUS' software - Removes the need for manual monitoring - Compact - Recoverable and reusable - Suitable for safety critical applications - Low power consumption	
Specifications	
Sensor Type	MEMS Sensor
Calibrated ranges	$\pm 3^\circ$ $\pm 5^\circ$ $\pm 10^\circ$ $\pm 15^\circ$
Sensor accuracy	$\pm 0.05\%$ full scale
Resolution*	0.008% full scale
Repeatability	$\pm 0.01\%$ full scale
Operating temperature	-20 to +80°C
Input voltage	10 - 16V DC
Current consumption	17mA (biaxial)
Output signal at full range	$\pm 2.5V$ DC differential
Housing material	Aluminium
Ingress protection	IP67
Dimensions	L 115mm x W 45mm x H 45mm
Weight (without cable)	370g

TLT6

Mems Tiltensor
Submersible



Description

The MEMS Tiltensor measures rotation of structures in the vertical plane.

The measurement of vertical rotation perpendicular to the structure is obtained by using an optional 90° angle bracket.



Features

- Simple, well proven device, ideal for measuring tilt in structures
- Accurate and precise using MEMS sensors
- Measures vertical rotation
- Stainless Steel submersible, waterproof to 2000kPa

Benefits

- Easy to automate using data acquisition systems and 'ARGUS' software
- Removes the need for manual monitoring
- Compact
- Recoverable and reusable
- Suitable for safety critical applications
- Low power consumption

Specifications

Sensor Type	MEMS Sensor			
Calibrated ranges	±3°	±5°	±10°	±15°
Sensor accuracy	±0.05% full scale			
Resolution*	0.008% full scale			
Repeatability	±0.01% full scale			
Operating temperature	-20 to +80°C			
Input voltage	10 -16V DC			
Current consumption	9mA (uniaxial)	17mA (biaxial)		
Output signal at full range	±2.5V DC differential			
Housing material	Stainless Steel			
Ingress protection	IP68 to 200mH ₂ O (2000kPa)			
Dimensions	192mm x 32mmØ			
Weight (without cable)	540g			

Qualifiers apply to the product specifications marked with a * symbol. Please refer to the product datasheet for the complete specifications and full product information.



DAM APPLICATION

Products	Page	Type of Measurement	Where is it used?
VWLOG2, GPRS, Sensly Monitoring Platform	8	Datalogger	Used to read, record and display the data from sensors with the option for remote cellular transmission
Pendulum System	18	Inclination	Used for precision monitoring of horizontal displacement within dam foundations and of large dam structures - dam body and intake tower
Digital Inclinometer, GEOSmart, Inclinometer Casing Smart In-place Inclinometer	20	Inclination	Used to monitor horizontal subsurface failure in a slope and possible slip plane movement
VW Crackmeter, VW Triaxial Jointmeter Mechanical Jointmeter	22	Joint & Crack	Monitoring the opening and closing of fissures in a tunnel wall
VW Strain Gauges, Concrete Embedment Strain Gauges	44	Strain	Measuring strain in steel members or mass concrete
VW Piezometer, Standpipe Piezometer Water Level Meter	37	Water	Measuring pore pressures within the soil around dams





Soil Instruments has over 50 years' experience in the monitoring of dams, reservoirs and associated projects, working on structures and environments on a global scale.

This table illustrates the comprehensive range of instrumentation we typically supply within Dam applications.

soil
INSTRUMENTS

Water



W1 Standpipe Piezometer



Description

The Standpipe Piezometer (Casagrande Piezometer) is used to monitor piezometric water levels in vertical boreholes.

The Standpipe Piezometer typically comprises two parts; at its lowest point is a porous piezometer tip, connected to the tip is a riser pipe which continues upwards out of the top of the borehole.



Features

- Excellent long-term reliability
- Porous plastic or ceramic filter tip
- Choice of PVC or galvanized steel riser pipe
- Drive-in tip available
- Can measure artesian pressures using a Bourdon Gauge readout

Benefits

- Simple, low cost system
- Ideal for routine site investigation
- Used for monitoring piezometric water levels in vertical boreholes

Specifications

Piezometer Tips		
Type*	Porous Plastic	Drive-in
Element diameter	27mm	27mm
Lengths*	300mm 1000mm	300mm
Overall diameter	43mm	32mm
Pore diameter	60 micron	60 micron
Permeability	3 x 10 ⁻⁴ m/s (low entry)	
Material*	PVC	Galvanised Steel
Tubing and coupling		
Tubing material	PVC	Galvanised Steel
Tubing lengths	1m 1.5m 3m	1m 3m
Coupling material	PVC	Galvanised Steel

W2 Hydraulic Piezometer



Description

The Hydraulic Piezometer is designed for accurately measuring pore water pressures in fully or partially saturated soil and rock. The system comprises a porous ceramic piezometer tip sealed into the measuring horizon and connected to a remote measuring position via two nylon tubes filled with hydraulic oil.



Features

- Simple and reliable device
- Accurate with excellent long-term stability
- Fast response to pressure changes
- Inaccuracies due to air entrapment and gas accumulation at the tip are avoided
- Capable of measuring pore pressures from 2000 kPa to -50 kPa

Benefits

- No electronic components in tip ensures long-term reliability
- Twin hydraulic tubing is strong, flexible and suitable for long-term use
- Comprises all non-corroding materials
- Pressure measurement takes place at the terminal location and not within the piezometer tip

Specifications

Range (kPa)	Bourdon Gauge: -5 kPa to 5000 kPa	Digital Transducer: -5 kPa to 2000 kPa
Accuracy	Bourdon Gauge: ±1.0% full scale	Digital transducer: ±0.25% full scale
Material	Porous ceramic, PVC, Brass and Nylon	

Filter Types - Porous Ceramic		
50mm Ø	Bull nosed, Cylindrical or Push-in Types	HAE 1 Micron or LAE 60 Microns

Hydraulic Tubing	
Type	Twin Nylon tubes sheathed in Polythene, flat or round in section
Bend radius	0.3m
Burst pressure	13.8MPa
Weight /m	36g


W4 Heavy Duty Vibrating Wire Piezometer



Description

The Heavy Duty Vibrating Wire Piezometer accurately measures pore water pressure in fully or partially saturated soil. The heavy duty design prevents case stresses from affecting readings in extreme installations.

The transducer is fitted with a low air entry sintered steel or a high air entry ceramic filter.



Features

- Heavy duty design
- Manufactured from high grade 316 Stainless Steel for extended operation
- In-built temperature compensation
- Hermetically sealed
- Highly accurate device
- Fitted with thermistor
- Capable of measuring negative pore pressures to -50 kPa

Benefits

- Accurate, repeatable readings over long cable lengths
- Long working life, long-term stability and reliability
- Works in extreme installations and pressures up to 15000 kPa
- Fast response to pressure changes
- Advanced design prevents case stresses from affecting readings

Specifications

Range (kPa)	150 300 500 700 1000 1500 2000 4000 6000 10000 15000
Accuracy	±0.1% full scale
Linearity	±0.1% full scale
Resolution*	0.025% full scale minimum
Over range	200% of full scale
Diaphragm displacement	< 0.001 cm ³
Temperature range	-20 to +80°C
Excitation Method	Pluck or sweep
Material	316 grade Stainless Steel
Diameter	28mm
Weight	980g


W4 Heavy Duty Vibrating FLUSHABLE



Description

The Heavy Duty Vibrating Wire Piezometer accurately measures pore water pressure in fully or partially saturated soil. The heavy duty design prevents case stresses from affecting readings in extreme installations.

The transducer is fitted with a low air entry sintered steel or a high air entry ceramic filter.



Features

- Heavy duty design
- Manufactured from high grade 316 Stainless Steel for extended operation
- In-built temperature compensation
- Hermetically sealed
- Highly accurate device
- Fitted with thermistor
- Capable of measuring negative pore pressures to -50 kPa

Benefits

- Accurate, repeatable readings over long cable lengths
- Long working life, long-term stability and reliability
- Works in extreme installations and pressures up to 15000 kPa
- Fast response to pressure changes
- Advanced design prevents case stresses from affecting readings

Specifications

Range (kPa)	150 300 500 700 1000 1500 2000 4000 6000 10000 15000
Accuracy	±0.1% full scale
Linearity	±0.1% full scale
Resolution*	0.025% full scale minimum
Over range	200% of full scale
Diaphragm displacement	< 0.001 cm ³
Temperature range	-20 to +80°C
Excitation Method	Pluck or sweep
Material	316 grade Stainless Steel
Diameter	28mm
Weight	980g


W7 Water Level Indicator



Description

Water Level Indicators are used to measure the depth of water in standpipes, wells and boreholes.

The indicator comprises a Stainless Steel probe connected to a flexible graduated tape which is wound on to a hand reel. The reel houses a transistorised switched circuit, audio and visual indicators and a battery.



Features

- One instrument reads at many locations
- Flat, flexible tape for accurate readings
- Tape range: 30m-500m, 1mm divisions
- Lightweight
- Simple, reliable and easy to operate
- Audible and visual water level alert signals

Benefits

- Easily portable
- Advanced non-stick material prevents tape adhering to wet surfaces
- Economic water level monitoring
- Ideal for boreholes with small diameters

Specifications

Probe		
Type	Standard*	Slimline
Diameter	15mm	12mm
Length	230mm	170mm
Type	Shrouded	
Material	Stainless Steel	
Tape		
Lengths	30m 50m 100m 150m 200m 300m 500m	
Type	Contoured/Stranded steel conductors	
Material	Steel/Polypropylene coated	
Width	9.4mm	
Graduations	m - cm - mm	

W9 Standard Vibrating Wire Piezometer



Description

The Standard Vibrating Wire Piezometer provides accurate measurement of pore water pressures in fully or partially saturated soil.

The transducer is made from high quality 316 grade Stainless Steel and designed to handle pressure ranges from -50 to 4000 kPa.

W9ML Multi Level Vibrating Wire Piezometers



Description

The Multi Level Piezometer provides a convenient and integrated method for the installation of Vibrating Wire Piezometers at different levels within a single borehole.

The assembly of access tubes, piezometer housing, piezometer and cables can be pre-assembled on site.

W9P Drive-In Vibrating Wire Piezometers



Description

The Drive-In Vibrating Wire Piezometer has been developed to meet the stresses involved with installation of piezometers into soft ground and fill material, without pre-forming of a borehole, such as with cone penetration type installations.

Features • Small diameter • Manufactured from high grade 316 Stainless Steel for extended operation • In-built temperature compensation • Hermetically sealed • Suitable for long-term monitoring • Fitted with thermistor • Capable of measuring negative pore pressures to -50 kPa																							
Benefits • Accurate, repeatable readings over long cable lengths • Long working life, long-term stability and reliability • Fast response to pressure changes • Advanced design prevents case stresses from affecting readings • Over-voltage surge arrestor protects against electrical damage																							
Specifications <table> <tr> <td>Range (kPa)</td><td>300 500 700 1000 1500 2000 4000</td></tr> <tr> <td>Accuracy</td><td>±0.1% full scale</td></tr> <tr> <td>Linearity</td><td>±0.5% full scale</td></tr> <tr> <td>Resolution*</td><td>0.025% full scale minimum</td></tr> <tr> <td>Over range</td><td>200% of full scale</td></tr> <tr> <td>Diaphragm displacement</td><td>< 0.001 cm³</td></tr> <tr> <td>Temperature range</td><td>-20 to +80°C</td></tr> <tr> <td>Excitation Method</td><td>Pluck or sweep</td></tr> <tr> <td>Material</td><td>316 grade Stainless Steel</td></tr> <tr> <td>Diameter</td><td>19mm</td></tr> <tr> <td>Weight</td><td>190g</td></tr> </table>		Range (kPa)	300 500 700 1000 1500 2000 4000	Accuracy	±0.1% full scale	Linearity	±0.5% full scale	Resolution*	0.025% full scale minimum	Over range	200% of full scale	Diaphragm displacement	< 0.001 cm ³	Temperature range	-20 to +80°C	Excitation Method	Pluck or sweep	Material	316 grade Stainless Steel	Diameter	19mm	Weight	190g
Range (kPa)	300 500 700 1000 1500 2000 4000																						
Accuracy	±0.1% full scale																						
Linearity	±0.5% full scale																						
Resolution*	0.025% full scale minimum																						
Over range	200% of full scale																						
Diaphragm displacement	< 0.001 cm ³																						
Temperature range	-20 to +80°C																						
Excitation Method	Pluck or sweep																						
Material	316 grade Stainless Steel																						
Diameter	19mm																						
Weight	190g																						

Features • Multi level piezometer installation • Integrated, neat system • Pre-assembled to suit site requirements • Fast installation • Reduces drill rig standing time • Suitable for long-term monitoring																					
Benefits • Self-supporting assembly • Easier removal of drill rig casing • Easier installation • Long working life, long-term stability and reliability																					
Specifications <table> <tr> <td>Range (kPa)</td><td>300 500 700 1000 1500 2000 4000</td></tr> <tr> <td>Accuracy</td><td>PVC/316 grade Stainless Steel</td></tr> <tr> <td>Linearity</td><td>±0.5% full scale</td></tr> <tr> <td>Resolution*</td><td>0.025% full scale minimum</td></tr> <tr> <td>Over range</td><td>200% Of full scale</td></tr> <tr> <td>Diaphragm displacement</td><td>< 0.001 cm³</td></tr> <tr> <td>Temperature range</td><td>-20 to +80°C</td></tr> <tr> <td>Diameter</td><td>64mm</td></tr> <tr> <td>Material</td><td>PVC/316 grade Stainless Steel</td></tr> <tr> <td>Weight (without cable & filter)</td><td>240g</td></tr> </table>		Range (kPa)	300 500 700 1000 1500 2000 4000	Accuracy	PVC/316 grade Stainless Steel	Linearity	±0.5% full scale	Resolution*	0.025% full scale minimum	Over range	200% Of full scale	Diaphragm displacement	< 0.001 cm ³	Temperature range	-20 to +80°C	Diameter	64mm	Material	PVC/316 grade Stainless Steel	Weight (without cable & filter)	240g
Range (kPa)	300 500 700 1000 1500 2000 4000																				
Accuracy	PVC/316 grade Stainless Steel																				
Linearity	±0.5% full scale																				
Resolution*	0.025% full scale minimum																				
Over range	200% Of full scale																				
Diaphragm displacement	< 0.001 cm ³																				
Temperature range	-20 to +80°C																				
Diameter	64mm																				
Material	PVC/316 grade Stainless Steel																				
Weight (without cable & filter)	240g																				

Features • Robust body, designed to support the stresses of push-in techniques • Sharp nose cone to reduce pushing soil resistance • Body equipped with spigot to adapt to pushing rods • Fitted with flexible screened cable • Integral thermistor																					
Benefits • Manufactured from 316 Stainless Steel • Robust design prevents push-in stresses from affecting sensor performance • Reduces installation time • Reduces installation costs • Push-in method can reduce soil re-stabilisation time compared with borehole formation																					
Specifications <table> <tr> <td>Range (kPa)</td><td>300 500 700 1000 1500 2000 4000</td></tr> <tr> <td>Accuracy</td><td>±0.1% full scale</td></tr> <tr> <td>Linearity</td><td>±0.5% full scale</td></tr> <tr> <td>Resolution*</td><td>0.025% full scale minimum</td></tr> <tr> <td>Over range</td><td>200% Of full scale</td></tr> <tr> <td>Diaphragm displacement</td><td>< 0.001 cm³</td></tr> <tr> <td>Temperature range</td><td>-20 to +80°C</td></tr> <tr> <td>Diameter</td><td>36mm</td></tr> <tr> <td>Material</td><td>316 grade Stainless Steel</td></tr> <tr> <td>Weight (without cable & filter)</td><td>320g</td></tr> </table>		Range (kPa)	300 500 700 1000 1500 2000 4000	Accuracy	±0.1% full scale	Linearity	±0.5% full scale	Resolution*	0.025% full scale minimum	Over range	200% Of full scale	Diaphragm displacement	< 0.001 cm ³	Temperature range	-20 to +80°C	Diameter	36mm	Material	316 grade Stainless Steel	Weight (without cable & filter)	320g
Range (kPa)	300 500 700 1000 1500 2000 4000																				
Accuracy	±0.1% full scale																				
Linearity	±0.5% full scale																				
Resolution*	0.025% full scale minimum																				
Over range	200% Of full scale																				
Diaphragm displacement	< 0.001 cm ³																				
Temperature range	-20 to +80°C																				
Diameter	36mm																				
Material	316 grade Stainless Steel																				
Weight (without cable & filter)	320g																				


W10 V-Notch Weir Monitor



Description

The V-Notch Weir system is used to measure water flow volume. It is used predominately in dams, open channels such as streams and in tunnels.

The system comprises a Stainless Steel plate with a notch profile chosen to suit predicted flow rates.



Features

- Uses Vibrating Wire technology
- Suitable for manual or remote monitoring
- Accurate and sensitive water level monitoring
- Rectangular or triangular notched plate available
- Easy to automate via data acquisition software

Benefits

- Low cost, low maintenance system
- Simple principle of operation in manual version
- Accurate, repeatable readings over long cable lengths when using VW system
- Long-term stability and reliability
- Connecting cable is strong, screened and flexible

Specifications

VW Precision Water Level Sensor

Type	Automated/Remote	Optical
Range	300mm	300mm
Accuracy*	0.5% full scale	±1mm
Linearity	±0.5% full scale	
Resolution*	0.025% full scale min	1mm
Operating temperature	+5 to +60°C	
Dimensions	150mm x Ø32mm	
Weight (sensor only)	600g	
Material	Stainless Steel	
Excitation	Pluck or sweep	


W12 4-20mA Piezometer



Description

The 4-20mA Piezometer is designed for accurately measuring pore water pressures in fully or partially saturated soil and rock.

The transducer is fitted with a sintered Stainless Steel filter disc and is available as a vented (gauge) piezometer or a non-vented (absolute) piezometer.



Features

- Accurate with excellent long-term stability
- Fitted with thermistor for temperature monitoring
- Fast response to pressure changes
- Advanced design prevents case stresses from affecting readings
- Capable of measuring negative pore pressures to -50 kPa (non-vented unit)

Benefits

- Small diameter device
- Manufactured from high grade 316 Stainless Steel for extended operation
- Hermetically sealed, ensures long working life
- Connecting cable is strong, screened and flexible

Specifications


Range (kPa)	100 200 350 700 2000 3500
Accuracy	±0.1% full scale
Linearity	±0.5% full scale
Resolution*	0.025% full scale (minimum)
Over range	200% of full scale
Diaphragm displacement	< 0.001 cm ³
Temperature range	-20 to +80°C
Excitation method	4-20mA loop
Material	316 grade Stainless Steel
Diameter	19mm
Weight	130g

W14 Ground Water Level Loggers



Description

Ground water level loggers are durable, versatile and cost effective tools which deliver accurate water level and temperature readings for many years. Groundwater professionals have been successfully employing this range of loggers to monitor both open waters and wells, to perform pump and slug tests, to complete wetland and tidal studies with excellent results.



Features

- Automatic elevation adjustment with short term barometric compensation
- Easy field recalibration
- Measuring range of up to 10m, 30m, 60m and 120m
- Deployed and operated by one person
- Real time reading of height of water and temperature

Benefits

- Long term, accurate and robust groundwater level and temperature monitoring
- Simple, reliable and easy to read
- Multiple applications
- Low running costs
- Extended battery life up to 15 years dependant upon use

Specifications

Logger type	Pressure ranges
dipperLog TOUGH+	0-10m 0-30m 0-60m 0-120m
dipperLog 128+	0-10m 0-30m 0-60m 0-120m
barLog	n/a
Sensor	
# of data points	128,000
Download speed	21,333.33 data sets per minute
Water level accuracy	±0.05% full scale
Temperature accuracy	±0.05°C
Over range	2x Factory calibrated range
Operating temperature	-20° to +80°C
Pressure resolution	0.01%
Battery life	Up to 5,000,000 readings (up to 15 years)



Established 1962

over **60 years** serving
the Geotech Market

Over **1,800** high quality
geotechnical
products for sale

36 local distributors
and approved partners
around the world

Customers in
111 countries



Soil Instruments around the world



Soil Instruments supply geotechnical and structural instrumentation worldwide through our main offices situated in UK and our long standing global network of distributors.

- Soil Instruments Ltd UK
- Distributor network in over 30 countries worldwide.

For details on these distributors please visit our website soilinstruments.com and view our distributors section.



Bell Lane, Uckfield, East Sussex
TN22 1QL United Kingdom

t: +44 (0) 1825 765044
w: soilinstruments.com

e: sales@soilinstruments.com